
Telemecanique Sensors

Sensors, Switches and Machine Safety Product Guide



Limit Switches



Proximity



Photoelectric



Ultrasonic



Pressure



Machine Safety



RFID



Cabling

Simply easy!™

Telemecanique Sensors

Simply easy!™

Founded over 90 years ago, **Telemecanique Sensors** specializes in sensors and sensor-related technology.

As a **global leader** in the sensors business, we help our customers select the right technology to get the best performance and reliability from their machines.



Focused on 3 core values – **Simplicity, Proximity and Expertise** – we have become experts in factory automation sensors as well as specialists in demanding applications, making our customers' lives "Simply easy!"

Sensors, Switches and Machine Safety Product Guide

TABLE OF CONTENTS

Detection Solutions


| | |
|-------------------------------------|----|
| Choose the Right Sensor Guide | 3 |
| Pressure Sensors | 4 |
| Limit Switches..... | 7 |
| Inductive Proximity Sensors..... | 11 |
| Capacitive Sensors..... | 15 |
| Ultrasonic Sensors..... | 16 |
| Photoelectric Sensors..... | 18 |
| RFID Systems..... | 21 |
| Cabling Components | 22 |

Safety Detection Solutions






| | |
|---|----|
| Safety Introduction..... | 26 |
| Safety Interlock Switches..... | 27 |
| RFID Contactless Safety Switches | 32 |
| Safety Light Curtains | 33 |
| Emergency Stop Rope Pull Switches | 34 |
| Safety Modules | 35 |
| Sensor Applications..... | 36 |

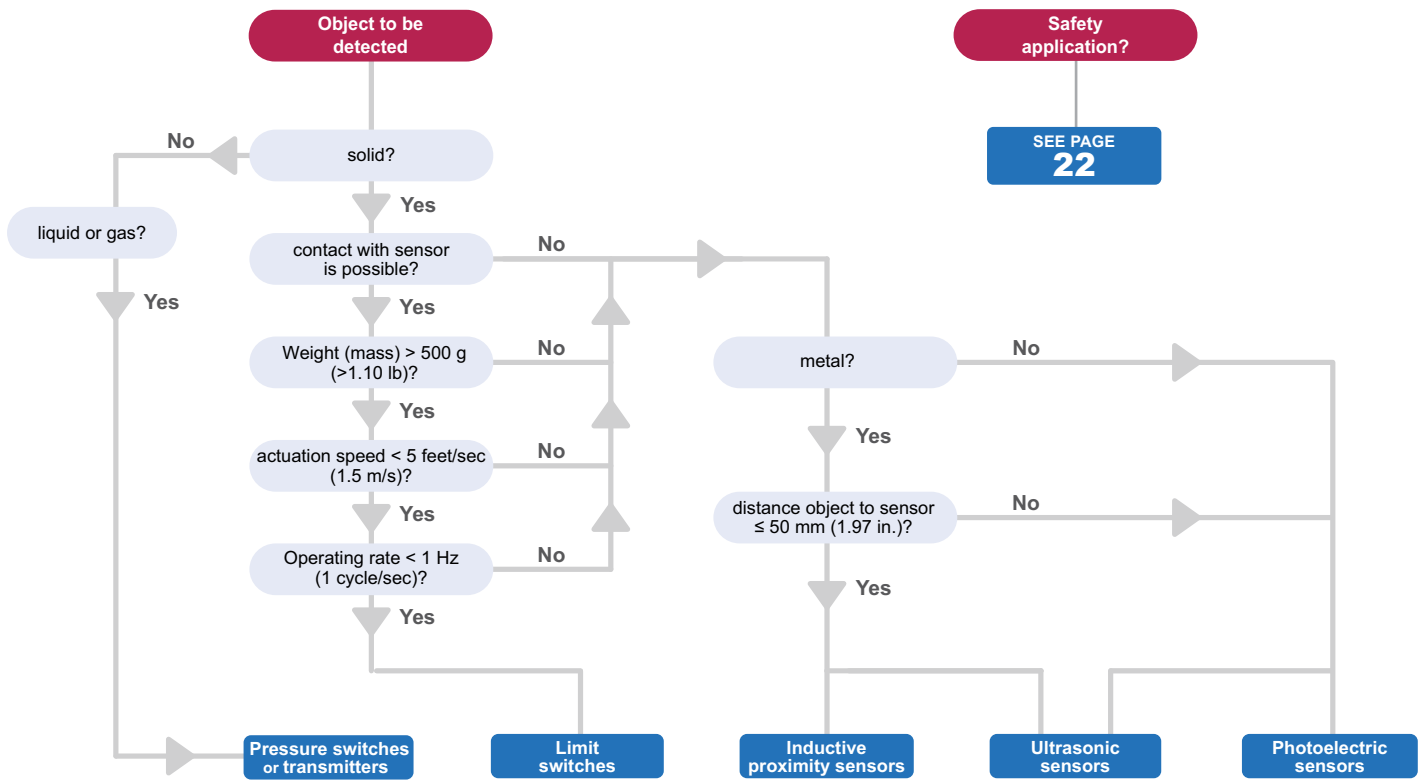Visit our website and discover our full offer on
www.tesensors.com

Detection sensor selection guide



Industries

| | XM  | XC  | XS  | XX  | XU  |
|------------------------------|--|--|--|--|--|
| Machine tools | ● | ● | ● | ● | ● |
| Food & beverage | ● | ● | ● | ● | ● |
| Packaging | ● | ● | ● | ● | ● |
| Hoisting | ● | ● | ● | ● | ● |
| Conveying | ● | ● | ● | ● | ● |
| Mobile equipment | ● | ● | ● | ● | ● |
| Assembly | ● | ● | ● | ● | ● |
| Wood industry | ● | ● | ● | ● | ● |
| Automotive industry | ● | ● | ● | ● | ● |
| Paper industry | ● | ● | ● | ● | ● |
| Mines & minerals | ● | ● | ● | ● | ● |
| Pumping & water treatment | ● | ● | ● | ● | ● |
| Railroad & embedded vehicles | ● | ● | ● | ● | ● |
| Lifts & escalators | ● | ● | ● | ● | ● |
| Service industry & building | ● | ● | ● | ● | ● |

● Recommended
● Possible
● Unsuitable

SEE PAGE
4

SEE PAGE
7

SEE PAGE
10

SEE PAGE
13

SEE PAGE
14

Pressure sensors

Pressure sensors are control circuit rated devices used in pneumatic or hydraulic systems on a wide variety of machine and process applications to protect the equipment and control or monitor system pressure.



1 - Choose the fluid, pressure range and fluid temperature

...appropriate to the application.

If response time is not critical, consider



Electromechanical pressure switch with contacts

If response time is critical or you need to monitor pressure, consider



Electronic pressure sensor with solid-state or analog output

2 - Choose the output type

according to the load compatibility (contactor, PLC) Contact C/O, DC3-wire, PNP, NPN, DC NO or NC, analog, or 3 or 4-wire



3 - Choose the electrical connection

M12 connector, Packard Metri-Pack, DIN43650A or screw clamp terminals with a tapped cable entry

4 - Choose the fluid connection

according to facility standards or machine requirements... 1/4" NPT female, G 1/4 BSP female...

Pressure switches: Class 9012

| CLASS 9012 Pressure Switches | Air, water, hydraulic oils, gases, steam (depending on model) | | | |
|---|---|---|---|-----------|
| | Range on decreasing pressure, psig | Approx. differential Mid-Range ⁽¹⁾ | Adjustable Differential NEMA Type 4, 4X, 13 | |
| | psi | | SPDT | DPDT |
| | Diaphragm Actuated | | 1/2" - 14 NPTF Elec Conn | |
|  | 0.2 - 10 | 0.7 - 2 | 9012GAW1 | 9012GAW21 |
| | 1 - 40 | 2.4 - 7 | 9012GAW2 | 9012GAW22 |
| | 1.5 - 75 | 3.9 - 15 | 9012GAW4 | 9012GAW24 |
| | 3 - 150 | 6.6 - 30 | 9012GAW5 | 9012GAW25 |
| | 5 - 250 | 11 - 49 | 9012GAW6 | 9012GAW26 |
| | 13 - 425 | 20 - 82 | 9012GBW1 | 9012GBW21 |
| | 20 - 675 | 35 - 130 | 9012GBW2 | 9012GBW22 |
| | 1/4" NPTF | | | |
|  | Range on decreasing pressure, psig | Approx. differential Mid-Range ⁽¹⁾ | Adjustable Differential NEMA Type 4, 4X, 13 | |
| | psi | | SPDT | DPDT |
| | Piston Actuated | | 1/2" - 14 NPTF Elec Conn | |
| | 20 - 1000 | 65 - 200 | 9012GCW1 | 9012GCW21 |
| | 90 - 2900 | 187 - 560 | 9012GCW2 | 9012GCW22 |
| | 170 - 5600 | 425 - 1050 | 9012GCW3 | 9012GCW23 |
| | 1/4" NPTF | | | |

| Air, water, hydraulic oils, gases, steam (depending on model) | | | |
|---|---|--|--------------------------------|
| Range on decreasing pressure, psig | Approx. differential Mid-Range ⁽¹⁾ | Adjustable Differential Open Type or NEMA Type 1 Enclosure | |
| psi | | Open Type | NEMA Type 1 |
| Diaphragm Actuated | | 1/2" conduit entry, unthreaded | |
| 0.2 - 10 | 0.4 - 0.9 | 9012GNO1 | 9012GNG1 |
| 1 - 40 | 1.2 - 3.6 | 9012GNO3 | 9012GNG3 |
| 1.5 - 75 | 2.2 - 6.6 | 9012GNO4 | 9012GNG4 |
| 3 - 150 | 4.2 - 13.2 | 9012GNO5 | 9012GNG5 |
| 5 - 250 | 7.4 - 33.6 | 9012GNO6 | 9012GNG6 |
| 13 - 425 | 13 - 37.2 | 9012GPO1 | 9012GPG1 |
| 20 - 675 | 19 - 58.8 | 9012GPO2 | 9012GPG2 |
| | Piston Actuated | | 1/2" conduit entry, unthreaded |
| 20 - 1000 | 49 - 150 | --- | 9012GQG1 |
| 90 - 2900 | 141 - 455 | 9012GQO2 | 9012GQG2 |
| 170 - 5600 | 200 - 950 | 9012GQO3 | 9012GQG3 |
| 270 - 9000 | 350 - 1400 | --- | 9012GQG4 |
| | 1/4" NPTF | | |

SQUARE DTM
by Schneider Electric

⁽¹⁾ The differential adds to the range setting and determines the operating point on rising pressure.


See our Industrial Pressure Switch Catalog at: <https://tesensors.com/us/en/document/9012CT9701>

Pressure switches: XM Range

| XMLA / XMLB Electromechanical | | Hydraulic oils, air, fresh water, sea water / Temp. : up to 70° C | | | |
|---|-----|---|--------------|---|-------------|
| Screw terminal | | 1 C/O single pole contact fixed differential | | 1 C/O single pole contact adjustable differential | |
| | | Bar | psi | 1/2"-14 NPT | 1/2"-14 NPT |
| | -1 | -14.5 | XMLAM01V2S13 | XMLBM02V2S13 | |
| | 2.5 | 36.3 | XMLA002A2S13 | XMLB002A2S13 | |
| | 4 | 58 | XMLA004A2S13 | XMLB004A2S13 | |
| | 10 | 145 | XMLA010A2S13 | XMLB010A2S13 | |
| | 20 | 290 | XMLA020A2S13 | XMLB020A2S13 | |
| | 35 | 508 | XMLA035A2S13 | XMLB035A2S13 | |
| | | Hydraulic oils / Temp. : up to 160° C | | | |
| | 1 | 14.5 | XMLA001R2S13 | XMLB001R2S13 | |
| | 70 | 1015 | XMLA070D2S13 | XMLB070D2S13 | |
| | 160 | 2320 | XMLA160D2S13 | XMLB160D2S13 | |
| | 300 | 4350 | XMLA300D2S13 | XMLB300D2S13 | |
| | 500 | 7250 | XMLA500D2S13 | XMLB500D2S13 | |

Pressure transducers: XM Range

| XMLR Electronic + Display | | Hydraulic oils, air, fresh water, refrigerant fluids | | | | | | |
|-------------------------------------|-----|--|--|---------------|---------------------------|------------------------------|--------------------------|--|
| M12 4 pin or 5 pin | | -20... +80° C | | Analog output | | Analog + 2 switching outputs | | |
| | | Bar | psi | 4...20 mA | 0...10 V | PNP - NO/NC programmable | | |
| | -1 | -14.5 | XMLRM01G0T25 | XMLRM01G0T75 | XMLRM01G2P25 | | | |
| | 1 | 14.5 | XMLR001G0T25 | XMLR001G0T75 | | | | |
| | 2.5 | 35.2 | XMLR2D5G0T25 | XMLR2D5G0T75 | | | | |
| | 10 | 145 | XMLR010G0T25 | XMLR010G0T75 | XMLR010G2P25 | | | |
| | 16 | 232 | XMLR016G0T25 | XMLR016G0T75 | XMLR016G2P25 | | | |
| | 25 | 362 | XMLR025G0T25 | XMLR025G0T75 | | | | |
| | 40 | 580 | XMLR040G0T25 | XMLR040G0T75 | XMLR040G2P25 | | | |
| | 100 | 1450 | XMLR100M0T25 | XMLR100M0T75 | | | | |
| | 160 | 2320 | XMLR160M0T25 | XMLR160M0T75 | | | | |
| | 250 | 3625 | XMLR250M0T25 | XMLR250M0T75 | XMLR250M2P25 | | | |
| | 400 | 5800 | XMLR400M0T25 | XMLR400M0T75 | XMLR400M2P25 | | | |
| | 600 | 8700 | XMLR600M0T25 | XMLR600M0T75 | | | | |
| | | | Hydraulic oils, air, fresh water, refrigerant fluids | | | | | |
| | | | -20... +80° C | | Analog + switching output | | 2 switching outputs | |
| | | | Bar | psi | PNP - NO/NC programmable | | PNP - NO/NC programmable | |
| | | Bar | psi | 4...20 mA | 0...10 V | | | |
| | -1 | -14.5 | XMLRM01G1P26 | | | XMLRM01G2P06 | | |
| | 1 | 14.5 | XMLR001G1P26 | | | XMLR001G2P06 | | |
| | 2.5 | 35.2 | XMLR2D5G1P26 | | | XMLR2D5G2P06 | | |
| | 10 | 145 | XMLR010G1P26 | XMLR010G1P76 | | XMLR010G2P06 | | |
| | 16 | 232 | XMLR016G1P26 | | | XMLR016G2P06 | | |
| | 25 | 362 | XMLR025G1P26 | | | XMLR025G2P06 | | |
| | 40 | 580 | XMLR040G1P26 | | | XMLR040G2P06 | | |
| | 100 | 1450 | XMLR100M1P26 | | | XMLR100M2P06 | | |
| | 160 | 2320 | | | | XMLR160M2P09 | | |
| | 250 | 3625 | XMLR250M1P26 | XMLR250M1P76 | | XMLR250M2P06 | | |
| | 400 | 5800 | XMLR400M1P26 | | | XMLR400M2P06 | | |
| | 600 | 8700 | XMLR600M1P26 | XMLR600MP76 | | | | |

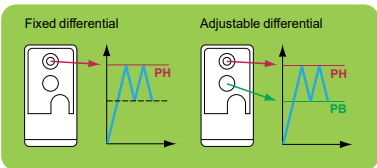

Pressure transducers: XM Range

| XMLP Electronic transmitter M12 4 pin (male) | Hydraulic oils, air, fresh water | | Analog output | | |
|--|----------------------------------|-----------|-----------------|--------------|-------------------------|
| | -22...+185° F (-30...+85° C) | | 4...20 mA | 0...10 V | 0.5...4.5 V ratiometric |
| | psi | bar | | | |
| | -14.5...0 | | XMLPM00RD23F | XMLPM00RD73F | XMLPM00RD13F |
| | -14.5...15 | | XMLPM15RD23F | XMLPM15RD73F | |
| | -14.5...60 | -1...4.13 | XMLPM60RD23F | XMLPM60RD73F | |
| | 0...5 | 0...0.34 | XMLPM15RD23FSD2 | | |
| | 0...15 | 0...1 | XMLP015RD23F | XMLP015RD73F | |
| | 0...30 | 0...2 | XMLP030RD23F | XMLP030RD73F | |
| | 0...50 | 0...3.4 | XMLP050RD23F | XMLP050RD73F | |
| | 0...100 | 0...6.8 | XMLP100PD230 | XMLP100PD730 | XMLP100PD130 |
| | 0...150 | 0...10.3 | XMLP150PD230 | XMLP150PD730 | XMLP150PD130 |
| | 0...300 | 0...20.6 | XMLP300PD230 | XMLP300PD730 | XMLP300PD130 |
| | 0...600 | 0...41.3 | XMLP600PD230 | XMLP600PD730 | XMLP600PD130 |
| | 0...1000 | 0...68.9 | XMLP1K0PD230 | XMLP1K0PD730 | XMLP1K0PD130 |
| | 0...2000 | 0...137.8 | XMLP2K0PD230 | XMLP2K0PD730 | XMLP2K0PD130 |
| | 0...3000 | 0...206.8 | XMLP3K0PD230 | XMLP3K0PD730 | XMLP3K0PD130 |
| | 0...6000 | 0...413.6 | XMLP6K0PD230 | XMLP6K0PD730 | XMLP6K0PD130 |

Other fluid and electrical connections available. Connect with a Telemecanique Sensors specialist or review catalog at: <https://tesensors.com/us/en/document/DIA4ED2150102EN>

| ZMLP Display and switch M12 4 pin (male) PNP | 4-20 mA analog + switching output | | 2 switching outputs |
|---|-----------------------------------|------------|---------------------|
| | NO/NC Programmable | | NO/NC Programmable |
| | Window | Hysteresis | Fixed hysteresis |
| | ZMLPA1P2SW | ZMLPA1P2SH | ZMLPA2P0SH |

Only usable with 4-20mA analog output XMLP electronic transmitter

| Quick mounting bracket | Horizontal plan | Vertical plan or pipe |
|------------------------|-----------------|-----------------------|
| | | XMLPZLH01 |

Cabling XM

| | | Connectors (female) | | |
|-----|-------|---------------------|--------------|--|
| M12 | | straight | elbowed | |
| (1) | 4 pin | XZCC12FDM40B | XZCC12FCM40B | |
| (1) | 5 pin | XZCC12FDM50B | XZCC12FCM50B | |
| | | Connectors (male) | | |
| (1) | 5 pin | XZCC12MDM50B | XZCC12MCM50B | |

(1) Plastic rings may be available in some versions

| | | PUR pre wired connectors (female)* | | |
|-------|------|------------------------------------|-------------|-----------------|
| M12 | | straight | elbowed | elbowed PNP LED |
| 4 pin | 2 m | XZCP1141L2 | XZCP1241L2 | XZCP1340L2 |
| | 5 m | XZCP1141L5 | XZCP1241L5 | XZCP1340L5 |
| | 10 m | XZCP1141L10 | XZCP1241L10 | XZCP1340L10 |

| | | PUR Jumper cables | | |
|--------------|-----|-------------------|---------------|--|
| M12 (female) | | straight | elbowed | |
| M12 (male) | | straight | straight | |
| 4 pin | 1 m | XZCR151041C1 | XZCR1512041C1 | |
| | 2 m | XZCR151041C2 | XZCR1512041C2 | |

* For a PVC cable, add the letter V after the P. Example: XZCPxxxxx become XZCPVxxxxx

Limit switches

Limit Switches detect solid objects by contact using varying heads depending on the application. Common detection head types include plungers, levers, roller levers, spring rods, and cat whiskers.



1 - Choose the body

...appropriate to the environment:

Choose size, material and duty



2 - Choose a head

according to the object to be detected

Detection movement type:

- Linear
- Rotary
- Lever
- Multidirectional Plunger
- Spring rod or cat whiskers

3 - Choose the contact

according to the automation function to achieve Snap action or slow break, 2, 3 or 4 contacts; NO, NC...



4 - Choose the electrical connection

according to facility standards or machine requirements...

M12 connector or screw clamp terminal with different tapped cable entries



Wireless

Limit switches: XC Wireless



| | | | | | | | | | | |
|------|-------------|--------------------------------------|----------------------|-------------------|----------------------|--------------------|----------------------|--|--|-------------------------|
| XCMW | Snap Action | One way pulsed wireless transmission | Metal Roller Plunger | Metal End Plunger | Plastic Roller Lever | Metal Roller Lever | Plastic Roller Lever | Adjustable Length Plastic Roller Lever | Adjustable Length Plastic Roller Lever | Round Plastic Rod Lever |
| | | | XCMW102 | XCMW110 | XCMW115 | XCMW116 | XCMW139 | XCMW145 | XCMW149 | XCMW159 |

Receivers




Connects to any sensor or switch!



| | | | | | | | | | | | | |
|------|-----------------|-------|-------|----------|-------|------|----------------|-------------|---------------------|--------------------------|--|-------------|
| ZBRR | 32 Transmitters | 4xPNP | ZBRRC | 2xRelays | ZBRRD | XZBW | 2 Transmitters | XZBWR2STT24 | 2 + 2 PNP (Q1 & Q2) | NO (PNP, NPN or contact) | 2-way continuous Wireless transmission | XZBWE112A24 |
|------|-----------------|-------|-------|----------|-------|------|----------------|-------------|---------------------|--------------------------|--|-------------|

See our Wireless Catalog at: <https://tesensors.com/us/en/document/DIA4ED2150902EN>

Limit switches: XC Range



| | | | | | | | | | |
|-------------------------------|-------------------|----------|--------|--|--|--|--|--|--|
| XCKD Metal | NO+NC Snap | 1/2" NPT | | | | | | | |
| | | | Pg11 | | | | | | |
| | | | M12 5P | | | | | | |
| XCKP Plastic | NO+NC Snap | 1/2" NPT | | | | | | | |
| | | | Pg11 | | | | | | |
| | | | M12 4P | | | | | | |
| XCKT Plastic | NO+NC Snap | 1/2" NPT | | | | | | | |
| | | | Pg11 | | | | | | |




| | | | | | |
|-----------------------------|-------------------|---------|--|--|--|
| XCMV Metal | NO+NC Snap | Deutsch | | | |
| | | M12 4P | | | |

Cabled and AMP connector versions also available



| | | | | | | | | | | |
|-----------------------------|-------------------|-------------------|--------|--|--|--|--|--|--|--|
| XCMD Metal | NO+NC Snap | 1 m* | | | | | | | | |
| | | NO+NC Slow | 1 m* | | | | | | | |
| | | NO+NC Snap | M12 5P | | | | | | | |
| | | 1 C/O Snap | M12 4P | | | | | | | |

*Many other cable lengths are available




| | | | | | | | |
|-----------------------------|-------------------|----------|--|--|--|--|--|
| XCKM Metal | NO+NC Snap | 1/2" NPT | | | | | |
| | | Pg11 | | | | | |
| XCKL Metal | NO+NC Snap | 1/2" NPT | | | | | |



| | | | | | | | | |
|-----------------------------|-------------------|--------|--|--|--|--|--|--|
| XCKJ Metal | NO+NC Snap | M20 | | | | | | |
| | | Pg13 | | | | | | |
| | | 1/2NPT | | | | | | |
| | | M12 5P | | | | | | |

(1) Plastic roller (2) Steel roller

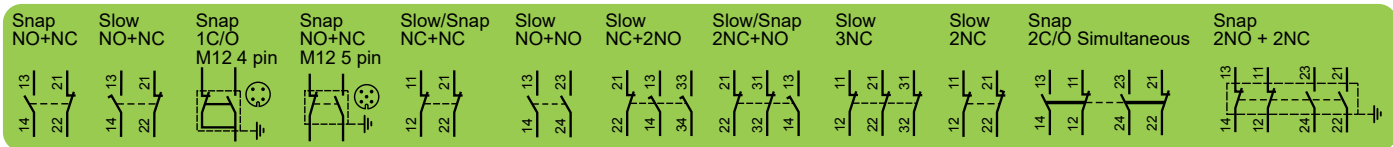

- M16 Tapped M16x1.5 for ISO cable gland
- M20 Tapped M20x1.5 for ISO cable gland
- Pg11 Tapped for a N°11 cable gland
- Pg13 Tapped for a N°13 cable gland
- 1/2NPT Tapped for a 1/2" NPT
- PF1/2 Tapped for a PF1/2"
- M12 5P Connector M12, 5 pin
- M12 4P Connector M12, 4 pin
- CG Tapped with cable gland included

Cabling XC

| | | PUR pre wired connectors (female)* | | |
|-------|------|------------------------------------|-------------|-----------------|
| M12 | | straight | elbowed | elbowed PNP LED |
| 4 pin | 2 m | XZCP1141L2 | XZCP1241L2 | XZCP1340L2 |
| | 5 m | XZCP1141L5 | XZCP1241L5 | XZCP1340L5 |
| | 10 m | XZCP1141L10 | XZCP1241L10 | XZCP1340L10 |
| 5 pin | 5 m | XZCP1164L5 | XZCP1264L5 | |

| Connectors (female) | | |
|---------------------|--------------|--------------|
| M12 | straight | elbowed |
| (1) 4 pin | XZCC12FDM40B | XZCC12FCM40B |
| (1) 5 pin | XZCC12FDM50B | XZCC12FCM50B |
| Connectors (male) | | |
| (1) 5 pin | XZCC12MDM50B | XZCC12MCM50B |


*For a PVC cable, add the letter V after the P. Example: XZCPxxxxx becomes XZCPVxxxxx

(1) Plastic rings may be available in some versions

Limit switches: XC Range


XCKP / XCKD / XCKT

Plastic / Metal / Plastic

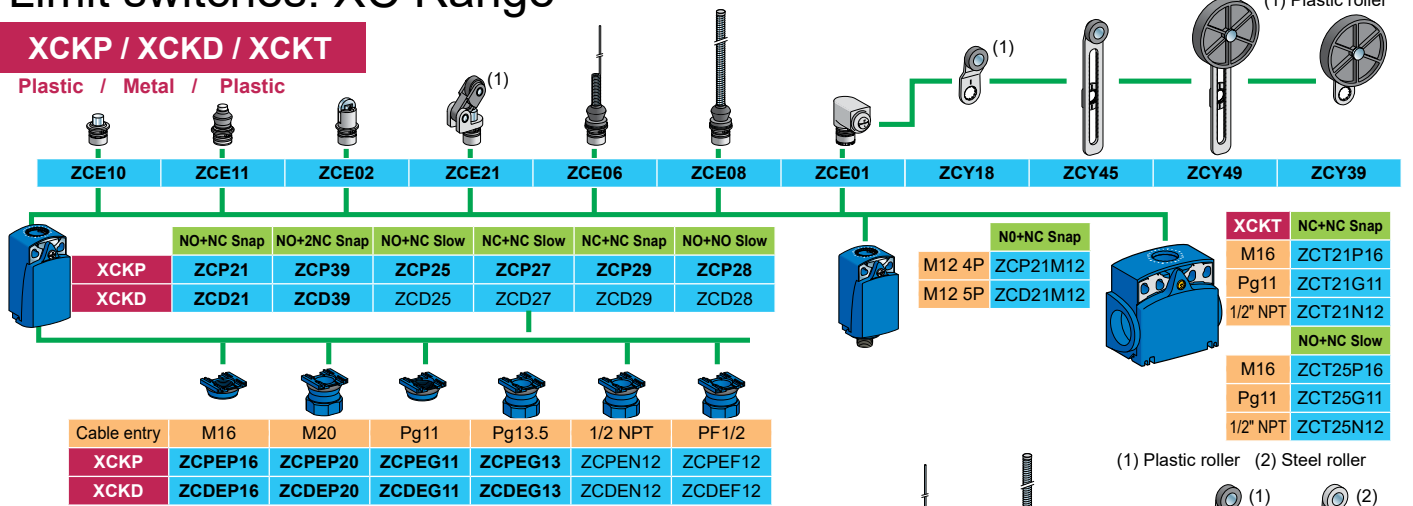


XCMD

Metal

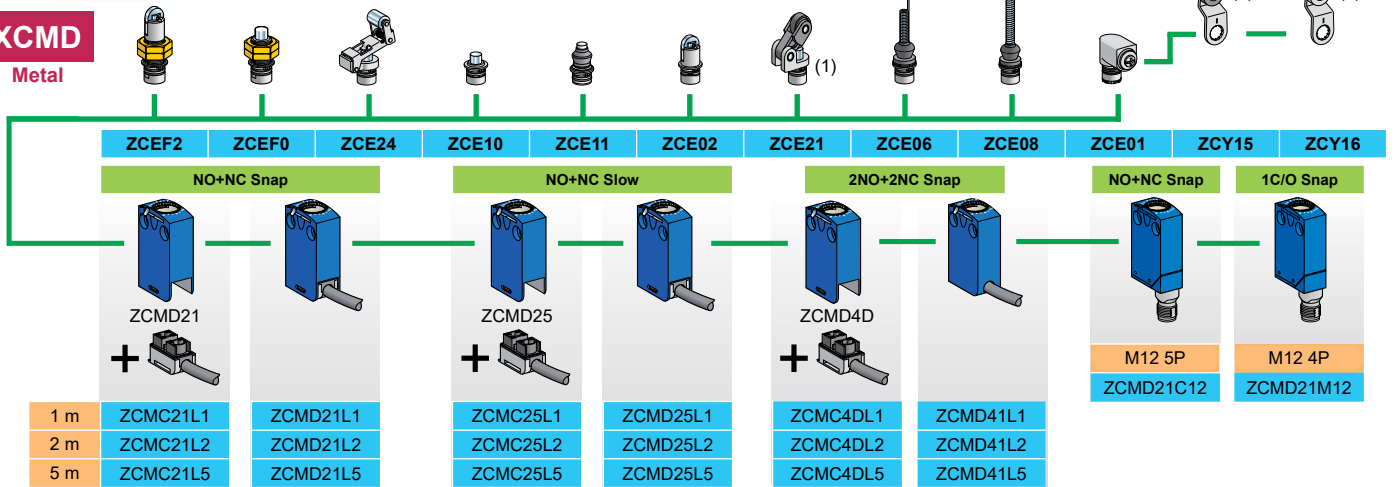

XCKM / XCKL


Metal

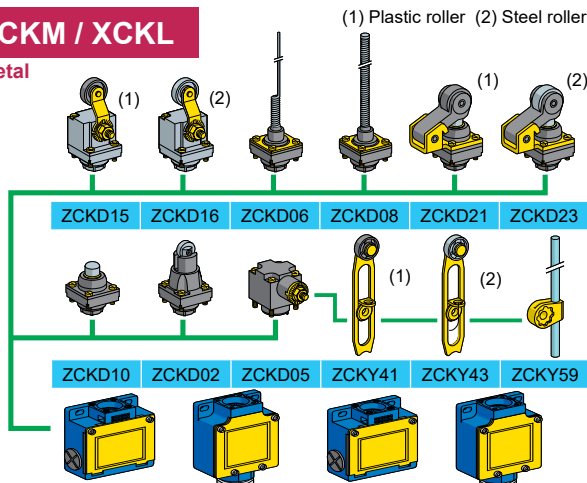

| | | | |
|------------------|------------|------------|-------------------|
| XCKM/XCKL | NO+NC Snap | NO+NC Slow | |
| 3xPg11 | ZCKM1 | ZCKM5 | |
| 3xM20 | ZCKM1H29 | ZCKM5H29 | |
| PE | ZCKL1 | ZCKL5 | |
| 1/2" NPT | ZCKL1H7 | ZCKL5H7 | |
| XCKS | NO+NC Snap | NO+NC Slow | |
| 1/2" NPT | ZCKS1H7 | ZCKS5H7 | |
| M20 | ZCKS1H29 | ZCKS5H29 | |
| XCKJ | NO+NC Snap | NO+NC Slow | 2C/O Simult. Snap |
| Pg13 | ZCKJ1 | ZCKJ5 | ZCKJ2 |
| M20 | ZCKJ1H29 | ZCKJ5H29 | ZCKJ2H29 |
| 1/2" NPT | ZCKJ1H7 | ZCKJ5H7 | ZCKJ2H7 |
| M12 5P | ZCKJ1D | ZCKJ5D | - |


XCKJ

Metal

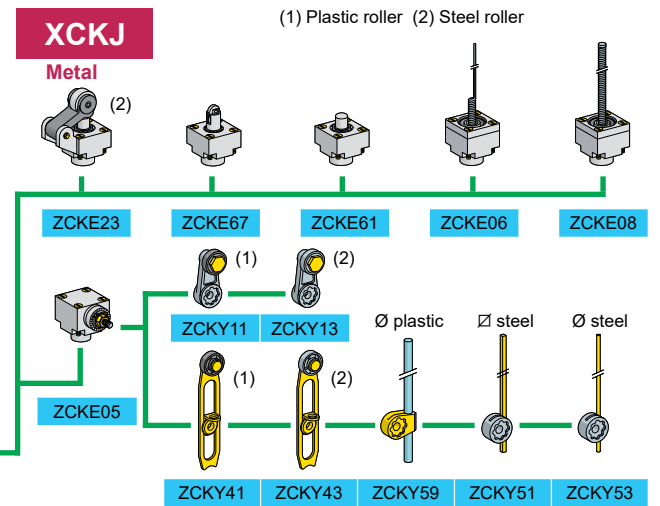


XCKS

Plastic

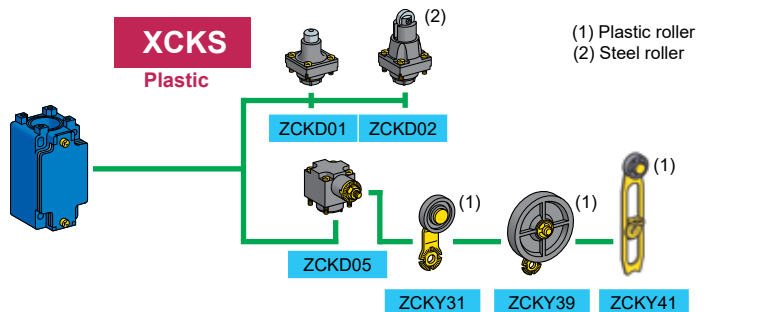

See our IEC Limit Switches Catalog at:
<https://tesensors.com/us/en/document/DIA4ED2170406EN>

Limit switches: Class 9007




| | | | Top metal end plunger | Top steel roller plunger | Plastic wobble stick | Rotary level arm type (1) | Side push rod plunger | Metal wire "cat's whisker" |
|--------------|-------------------------|------------|-----------------------|--------------------------|----------------------|---------------------------|-----------------------|----------------------------|
| 9007 | NO + NC Snap | 1/2-14 NPT | 9007C54E | 9007C54D | 9007C54J | 9007C54B2 | 9007C54G | 9007C54L |
| Metal | 2 NO + 2 NC Snap | 1/2-14 NPT | 9007C62E | 9007C62D | 9007C62J | 9007C2B2 | 9007C62G | 9007C62L |

Plunger style heads (2)



9007H 9007F

Separate levers (1)

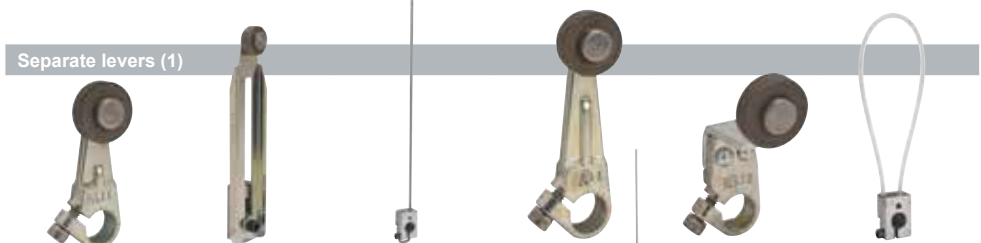

9007MA11 9007HA1 9007FA1 9007CA11 9007B11 9007FA6

(1) Over 200 lever arms and roller types available, order separately
 (2) See main catalog for other types



| | | | Top push plunger | Parallel roller plunger | Cross roller plunger | Rotary lever CW & CCW | Omnidirection wire whisker | Bushing mounted Parallel roller plunger | Booted top push plunger |
|------------------|--|---------------------|------------------|-------------------------|----------------------|-----------------------|----------------------------|---|-------------------------|
| 9007 MINI | Form C contact 3 wire (NO + NC) + GND | 3' (0.9m) Cable (3) | 9007MS01S0100 | 9007MS02S0100 | 9007MS03S0100 | 9007MS04S0100 | 9007MS05S0100 | 9007MS07S0100 | 9007MS10S0100 |
| | | DC Connector 4P | | 9007MS02S0054 | 9007MS03S0054 | 9007MS04S0054 | | | 9007MS10S0054 |
| | | AC Connector 4P (4) | | 9007MS02S0084 | | 9007MS04S0084 | 9007MS05S0082 | | |

(3) 01=3ft(0.9m), 02=6ft(1.8m), 03=9ft(2.7m), 04=12ft(3.7m), 05=18ft(5.5m), 13=33ft(10m) Ex: 9007MS01S0100 with 9ft (2.7m) cable becomes 9007MS01S0300.
 9007MS01S0100 with side entrance 9007MS01S0106. Not all combinations possible.
 (4) AC Connector, 82 has dual keyway with Pin 1=common, Pin 2=N.O. Pin 3=N.C. Pin 4=gnd, 84 has single keyway with Pin 1=common, Pin 2=N.C. Pin 3=gnd, Pin 4=N.O.

Separate levers



7A1N 7D 7XJ1N 7S

For many other possible options and more information, see our catalog at the link below.

See our NEMA Catalog at: <https://tesensors.com/us/en/document/9007CT0501>

Inductive Proximity Sensors

Inductive proximity sensors use the principle of electromagnetic induction to detect or measure metal objects without contact. An inductor develops a magnetic field capable of detection when a current flows through it.



1 - Choose the body size and the sensing distance

- appropriate to the environment:
- Requested sensing range
 - Size of product (diameter, length) and sensing range
- $\varnothing \times L$
XS1, 2, 4, 5, 6
- WxHxD
XS7, 8
- Choose a sensing range double the distance to the object.

2 - Choose the output type

- according to the load compatibility (contactor, PLC...)
DC3 wires 24V PNP, NPN, DC or AC/DC 2 wires 24-240V...
- DC3 24 V AC/DC 24...240 V DC2 24 V
-
- 48VDC possible, refer to www.tesensors.com


3 - Choose the electrical connection

- according to facility standards or machine requirements...
Cable, connector (M8, M12 in DC, 1/2 in AC/DC), screw clamp terminals.

4 - Choose the output signal & function



- according to the automation function to achieve
Discrete (NO, NC, NO+NC), analogue 0-10V 4 20mA rotation monitoring ...

Inductives: XS Range



| | | | M8 | | M12 | |
|------------------|-----|-----------|-------------------|-------------------|----------------|----------------|
| Sensing distance | | | 1.5 mm | 2.5 mm | 2 mm | 4 mm |
| DC3 | PNP | cable | XS508B1P A L2 | XS108B3P A L2 | XS512B1P A L2 | XS112B3P A L2 |
| | | connector | XS508B1P A M8 | XS108 B3P A M8 | XS512B1P A M12 | XS112B3P A M12 |
| | NPN | cable | XS508B1N A L2 | XS108B3N A L2 | XS512B1N A L2 | XS112B3N A L2 |
| | | connector | XS508B1N A M8 | XS108B3N A M8 | XS512B1N A M12 | XS112B3N A M12 |
| DC2 | | cable | XS508B3C A L2 | XS608B3C A L2 | XS512BSD A L2 | XS612B3D A L2 |
| | | connector | XS508B3C A L01M12 | XS608B3C A L01M12 | XS512BSD A M12 | XS612B3D A M12 |
| DC3 | PNP | cable | XS508BLP A L2 | XS608B1P A L2 | XS512BLP A L2 | XS612B1P A L2 |
| | | connector | XS508BLP A M12 | XS608B1P A M12 | XS512BLP A M12 | XS612B1P A M12 |
| | NPN | cable | XS508BLN A L2 | XS608B1N A L2 | XS512BLN A L2 | XS612B1N A L2 |
| | | connector | XS508BLN A M12 | XS608B1N A M12 | XS512BLN A M12 | XS612B1N A M12 |
| DC2 | | cable | XS508B1D A L2 | XS608B1D A L2 | XS512B1D A L2 | XS612B1D A L2 |
| | | connector | XS508B1D A M12 | XS608B1D A M12 | XS512B1D A M12 | XS612B1D A M12 |
| AC/DC | | cable | | | XS512B1M A L2 | XS612B1M A L2 |
| | | connector | | | XS512B1M A U20 | XS612B1M A U20 |
| Output function | | NO | A | A | A | A |
| | | NC | B | B | B | B |
| | | NO + NC | | | | (short only) C |

Inductives: XS Range



| | | | M18 | | M30 | |
|------------------|-----------|----------------|----------------|----------------|----------------|----------------|
| Sensing distance | | | 5 mm | 8 mm | 10 mm | 15 mm |
| DC3 | PNP | cable | XS518B1P A L2 | XS118B3P A L2 | XS530B1P A L2 | XS130B3P A L2 |
| | | connector | XS518B1P A M12 | XS118B3P A M12 | XS530B1P A M12 | XS130B3P A M12 |
| | NPN | cable | XS518B1N A L2 | XS118B3N A L2 | XS530B1N A L2 | XS130B3N A L2 |
| | | connector | XS518B1N A M12 | XS118B3N A M12 | XS530B1N A M12 | XS130B3N A M12 |
| DC2 | cable | XS518BSD A L2 | XS618B3D A L2 | XS530BSD A L2 | XS630B3D A L2 | |
| | connector | XS518BSD A M12 | XS618B3D A M12 | XS530BSD A M12 | XS630B3D A M12 | |
| DC3 | PNP | cable | XS518BLP A L2 | XS618B1P A L2 | XS530BLP A L2 | XS630B1P A L2 |
| | | connector | XS518BLP A M12 | XS618B1P A M12 | XS530BLP A M12 | XS630B1P A M12 |
| | NPN | cable | XS518BLN A L2 | XS618B1N A L2 | XS530BLN A L2 | XS630B1N A L2 |
| | | connector | XS518BLN A M12 | XS618B1N A M12 | XS530BLN A M12 | XS630B1N A M12 |
| DC2 | cable | XS518B1D A L2 | XS618B1D A L2 | XS530B1D A L2 | XS630B1D A L2 | |
| | connector | XS518B1D A M12 | XS618B1D A M12 | XS530B1D A M12 | XS630B1D A M12 | |
| AC/DC | cable | XS518B1M A L2 | XS618B1M A L2 | XS530B1M A L2 | XS630B1M A L2 | |
| | connector | XS518B1M A U20 | XS618B1M A U20 | XS530B1M A U20 | XS630B1M A U20 | |
| Output function | NO | | A | A | A | A |
| | NC | | B | B | B | B |
| | NO + NC | | (short only) C | | (short only) C | |

Accessories



| | |
|------------|---------|
| M8 | XSZB108 |
| M12 | XSZB112 |
| M18 | XSZB118 |
| M30 | XSZB130 |

Inductives: Unshielded - Non Flush Mountable





Long body



| | | | M12 | M18 | M30 |
|------------------|-----------|-----------|----------------|----------------|----------------|
| Sensing distance | | | 7 mm | 12 mm | 22 mm |
| DC3 | PNP | cable | XS612B4P A L2 | XS618B4P A L2 | XS630B4P A L2 |
| | | connector | XS612B4P A M12 | XS618B4P A M12 | XS630B4P A M12 |
| | NPN | cable | XS612B4N A L2 | XS618B4N A L2 | XS630B4N A L2 |
| | | connector | XS612B4N A M12 | XS618B4N A M12 | XS630B4N A M12 |
| AC/DC | cable | | XS618B4M A L2 | XS630B4M A L2 | |
| | connector | | XS618B4M A U20 | XS630B4M A U20 | |
| Output function | NO | | A | A | A |
| | NC | | B | B | B |


See our Inductive Sensors Catalog at: <https://tesensors.com/us/en/document/DIA4ED2150801EN>

Inductives: 1 Piece Stainless Steel Body & Face




| Flush mountable | | Factor 1 | | | | M8 | M12 | M18 | M30 |
|---|----------------|------------------|--------|-----------|----------|----------|----------|----------|-------|
|  | | Sensing distance | | | | 3 mm | 6 mm | 10 mm | 20 mm |
|  | 303 SS | DC3 | PNP NO | connector | XS908R1P | XS912R1P | XS918R1P | XS930R1P | |
| | 316L SS ECOLAB | | | | A M12 | A M12 | A M12 | A M12 | |
| | 303SS WFI | | | | | | | | |
| Non flush mountable | | Factor 1 | | | | M8 | M12 | M18 | M30 |
|  | | Sensing distance | | | | 6 mm | 10 mm | 20 mm | 40 mm |
|  | 303 SS | DC3 | PNP NO | connector | XS908R4P | XS912R4P | XS918R4P | XS930R4P | |
| | 316L SS | | | | A L2 | A M12 | A M12 | A M12 | |
| | | | | | | | | | |

Factor 1 = Ferrous and non-Ferrous at same sensing range. WFI - Weld Field immune.

Inductives: Unshielded - Food & Beverage

| 316L body, Natural PPS face, FDA approved | | | | M12 | M18 | M18 - Smooth | M30 |
|---|-----------|-----------|-----------|----------|----------|--------------|----------|
| Sensing distance | | | | 7 mm | 12 mm | 12 mm | 22 mm |
|  | DC3 | PNP NO | cable | XS212SAP | XS218SAP | XS2L2SAP | XS230SAP |
| | | | connector | A L2 | A L2 | A L2 | A L2 |
| | NPN NO | cable | XS212SAN | XS218SAN | XS2L2SAP | XS230SAN | |
| | | connector | A L2 | A L2 | A L2 | A L2 | |
| AC/DC | cable | | | | XS218SAM | | XS230SAM |
| | connector | | | | A U20 | | A U20 |

Inductives: Increased Range Extra Unshielded

| Short body (except 30mm) | | | | M12 | M18 | M30 - Long Body |
|---|-----|-----------|-----------|---|----------|-----------------|
| Sensing distance | | | | 8 mm | 16 mm | 30 mm |
|  | DC3 | PNP | cable | XS212B4P | XS218B4P | XS630B5P |
| | | | connector | A L2 | A L2 | A L2 |
| | NPN | cable | XS212B4N | XS218B4N | XS630B5N | |
| | | connector | A L2 | A L2 | A L2 | |
| Output function | NO | | |  | A | A |
| | NC | | |  | B | B |

Inductives: XS Range




| | | | 8x22x8 mm | 15x32x8 mm | 26x26x13 mm | 40x40x15 mm | |
|---------------------------|-----------|-----------|------------------|------------------|-------------------|-------------------|---------------|
| Sensing distance | | | 2.5 mm | 5 mm | 10 mm | 15 mm | |
| Flush mountable | DC3 | PNP | cable | XS7J1A1P A L2 | XS7F1A1P A L2 | XS7E1A1P A L2 | XS7C1A1P A L2 |
| | | connector | | XS7J1A1P A L01M8 | XS7F1A1P A L01M8 | XS7E1A1P A M8 | XS7C1A1P A M8 |
| | NPN | cable | | XS7J1A1N A L2 | XS7F1A1N A L2 | XS7E1A1N A L2 | XS7C1A1N A L2 |
| | | connector | | XS7J1A1N A L01M8 | XS7F1A1N A L01M8 | XS7E1A1N A M8 | XS7C1A1N A M8 |
| DC2 | cable | | XS7J1A1D A L2 | XS7F1A1D A L2 | XS7E1A1D A L2 | XS7C1A1D A L2 | |
| | connector | | XS7J1A1D A L01M8 | XS7F1A1D A L01M8 | XS7E1A1D A M8 | XS7C1A1D A M8 | |
| Flush adaptable mountable | DC3 | PNP | cable | | | XS8E1A1P A L2 | XS8C1A1P A L2 |
| | | | connector | | | XS8E1A1P A M8 | XS8C1A1P A M8 |
| | | NPN | cable | | | XS8E1A1N A L2 | XS8C1A1N A L2 |
| | | | connector | | | XS8E1A1N A M8 | XS8C1A1N A M8 |
| | AC/DC | cable | | | XS8E1A1M A L2 | XS8C1A1M A L2 | |
| | | connector | | | XS8E1A1M A L01U20 | XS8C1A1M A L01U20 | |
| Output function | NO | | A | A | A | A | |
| | NC | | B | B | B | B | |



| | | | 80x80x26 mm | Cubic | 40x40x117 mm | Flush mountable | Non flush mountable | |
|------------------|-----------|-----------|----------------|-------------------------------|--------------|------------------|---------------------|---------------|
| Sensing distance | | | 40 mm | | | 20 mm | 40 mm | |
| Flush mountable | DC3 | PNP | cable | XS7D1A1P A L2 | NO+NC | XS8C2A1PCM12 | XS8C2A4PCM12 | |
| | | connector | | XS7D1A1P A M12 | | XS8C2A1NCM12 | XS8C2A4NCM12 | |
| | NPN | cable | | XS7D1A1N A L2 | | NO | XS8C2A1DAM12 | XS8C2A4DAM12 |
| | | connector | | XS7D1A1N A M12 | | NO | XS8C2A1MAU20 | XS8C2A4MAU20 |
| DC2 | cable | | XS7D1A1D A L2 | DC4 | PNP | NO+NC | XS8C4A1PC N12 | XS8C4A4PC N12 |
| | connector | | XS7D1A1D A M12 | | NPN | NO+NC | XS8C4A1NC N12 | XS8C4A4NC N12 |
| AC/DC | cable | | XS7D1A1M A L2 | | NO or NC | XS8C4A1DP N12 | XS8C4A4DP N12 | |
| | connector | | XS7D1A1M A M12 | | NO or NC | XS8C4A1MP N12 | XS8C4A4MP N12 | |
| Output function | NO | | A | Select the type of connection | M20 | | P20 | |
| | NC | | B | | PG13 | | G13 | |
| | | | | | 1/2" NPT | | N12 | |
| Accessories | | | | | | AC/DC 24...240 V | | |
| For 26x26 | | | | | | XSZBE00 | XSZBE90 | |
| For 40x40 | | | | | | XSZBC00 | XSZBC90 | |
| | | | | | | DC2 24 V | | |

Rotation monitoring: XSAV Range

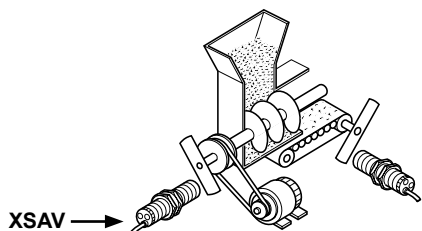

| | | | Low Speed | High Speed | |
|------------------|-------|-------------|-----------|------------|-----------|
| Sensing distance | | | 10 mm | 10 mm | |
| M30 | Flush | cable | | | |
| | | Output type | DC3-PNP | XSAV11373 | XSAV12373 |
| | | | AC/DC | XSAV11801 | XSAV12801 |

See our Inductive Sensors Catalog at: <https://tesensors.com/us/en/document/DIA4ED2150801EN>

Capacitive Sensors

Capacitive Proximity Sensors follow similar principles to the Inductive Sensors, but they produce an electrostatic field instead of an electromagnetic field. They can sense metallic as well as non-metallic materials such as paper, glass, liquids, and cloth. They can be used to detect any type of material, but need to be used in dry environments due to water being the easiest target to detect.



1 - Choose the body size

and the sensing distance



appropriate to the environment:

- Requested sensing range (from 0.05m to 8m)
- Size of product (diameter, length) and sensing range

2 - Choose the output type

according to the load compatibility (contactor, PLC...)

DC 3 or 4 wires PNP, NPN, or AC2 wire.

DC3 24 V

AC 24...240 V



3 - Choose the electrical connection

according to facility standards or machine requirements...
cable, connector, screw clamp terminals

4 - Choose the output signal & function

according to the automation function to achieve
Discrete (NO, NC, NO+NC)

Capacitive: Shielded (Flush mountable)



| | | | M12 | M18 | M30 | M32 smooth (1) |
|------------------|-----|-----------|----------------|----------------|----------------|----------------|
| Sensing distance | | | 2 mm | 5 mm | 10 mm | 15 mm |
| DC3 | PNP | cable | XT512B1P A L2 | XT518B1P A L2 | XT530B1P A L2 | --- |
| | | connector | XT512B1P A M12 | XT518B1P A M12 | XT530B1P A M12 | --- |
| AC | | cable | --- | XT518B1F A L2 | --- | XT532B1F A L2 |
| Output function | | NO | A | A | A | A |
| | | NC | B | B | B | B |
| | | NO + NC | C | C | C | C |

(1) Mounting accessory included with sensor

Capacitive: Unshielded (Not flush mountable)



| | | | M18 | M30 | M30 w/cable gland | M32 smooth (1) |
|------------------|-----|-----------|----------------|----------------|-------------------|----------------|
| Sensing distance | | | 8 mm | 15 mm | 15 mm | 15 mm |
| DC3 | PNP | cable | XT218A1P A L2 | XT230A1P A L2 | --- | --- |
| | | connector | XT218A1P C M12 | XT230A1P C M12 | --- | --- |
| | NPN | cable | XT218A1N A L2 | XT230A1N A L2 | --- | --- |
| AC | | cable | XT218A1F A L2 | XT230A1F A L2 | XT230A2M D B | XT232A1F A L2 |
| Output function | | NO | A | A | A | A |
| | | NC | B | B | B | B |
| | | NO + NC | C | C | C | C |
| | | NO or NC | | | D | |

| Accessories | Part Number | Description |
|-------------|-------------|---------------------------------|
| | XXZ12 | Ø 12 90-degree fixing bracket |
| | XUZA118 | Ø 18 90-degree fixing bracket |
| | XXZ30 | Ø 30 90-degree fixing bracket |
| | XTAZ30 | Threaded sleeve (mounting well) |

See our Capacitive Sensors Catalog at: <https://tesensors.com/us/en/document/DIA4ED2170904EN>


Ultrasonic Sensors

Ultrasonic Sensors perform contactless detection using reflected sound regardless of the target's shape, texture, color, or transparency. Ultrasonic Sensors typically operate in either diffuse, reflex, or thru-beam modes.



1 - Choose the body size

and the sensing distance



appropriate to the environment:
 -Requested sensing range (from 0.05m to 8m)
 -Size of product (cylindrical or flat) and sensing range
 Material of body

- Plastic housing
- Metal housing
- Stainless steel housing


2 Choose the output signal & function

according to the automation function to achieve discrete (NO, NC, NO+NC)....or analog (0-10V, 4-20mA)

- Software configurable or only remote teach button

3 Choose the output type

according to the load compatibility (contactor, PLC...)
 DC 3-wires PNP, NPN, or DC ...Analog 3 or 4-wires.



4 Choose the electrical connection

according to facility standards or machine requirements...
 cable, connector (M8 or M12)

Ultrasonics: XX Range



| | | | M12 | | M18 | | M18 plastic (2) | M18 brass (2) | M18 stainless (2) | M18 metal |
|-------------------|-----|---------|-------------|-------------|--------------|-------------------|-----------------|-----------------|-------------------|--------------|
| Sensing distance | | | 0.05 m | 0.1 m | 0.15 m | 0.5 m Adjust. (1) | 1 m Adjust. (1) | 1 m Adjust. (1) | 1 m Adjust. (1) | 0.05 m |
| Connectors/Cables | | | M8 4 pin | M8 3 pin | M12 4 pin | M12 4 pin | M12 5 pin | M12 5 pin | M12 5 pin | M12 4 pin |
| NO | DC4 | PNP/NPN | XX512A1KAM8 | | XX518A1KAM12 | | | | | |
| | | DC3 | PNP | | XX512A2PAM8 | XX518A3PAM12 | | | | XXV18B1PAM12 |
| | | NPN | | XX512A2NAM8 | XX518A3NAM12 | | | | XXV18B1NAM12 | |
| NO or NC | DC3 | PNP | | | | XX S 18P1PM12 | XX S 18B1PM12 | XX S 18S1PM12 | | |
| | | A | | | | XX A 18P1PM12 | XX A 18B1PM12 | XX A 18S1PM12 | | |
| Analog | DC3 | PNP | | | | XX918A3C2M12 | XX S 18P1AM12 | XX S 18B1AM12 | XX S 18S1AM12 | |
| | | | A | | | | XX A 18P1AM12 | XX A 18B1AM12 | XX A 18S1AM12 | |
| | | | S | | | XX918A3F1M12 | XX S 18P1VM12 | XX S 18B1VM12 | XX S 18S1VM12 | |
| | | | A | | | | XX A 18P1VM12 | XX A 18B1VM12 | XX A 18S1VM12 | |

(1) Adjustable with XXZPB100

(2) Configurable with XXZBOX01 by software

S = straight A = angled




| | | | M30 plastic (2) | | | | M30 Brass (2) | | | M30 Stainless (2) | | | |
|-------------------|-----|---------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-----------------|-----------------|-------------|
| Sensing distance | | | 1 m Adjust. (1) | 2 m Adjust. (1) | 4 m Adjust. (1) | 8 m Adjust. (3) | 1 m Adjust. (1) | 2 m Adjust. (1) | 4 m Adjust. (1) | 1 m Adjust. (1) | 2 m Adjust. (1) | 4 m Adjust. (1) | |
| Connectors | | | M12 5-pin | M12 5-pin | M12 5-pin | M12 5-pin | M12 5-pin | M12 5-pin | M12 5-pin | M12 5-pin | M12 5-pin | M12 5-pin | |
| NO or NC | DC3 | PNP | XX S 30P1PM12 | XX S 30P2PM12 | XXS30P4PM12 | | XX S 30B1PM12 | XX S 30B2PM12 | XXS30B4PM12 | XX S 30S1PM12 | XX S 30S2PM12 | XXS30S4PM12 | |
| | | A | XX A 30P1PM12 | XX A 30P2PM12 | | | XX A 30B1PM12 | XX A 30B2PM12 | | XX A 30S1PM12 | XX A 30S2PM12 | | |
| | DC4 | 2 x PNP | | | | XXS30P8PPM12 | | | | | | | |
| | | 2 x NPN | | | | XXS30P8NNM12 | | | | | | | |
| Analog | DC3 | PNP | 4...20mA | XX S 30P1AM12 | XX S 30P2AM12 | XXS30P4AM12 | | XX S 30B1AM12 | XX S 30B2AM12 | XXS30B4AM12 | XX S 30S1AM12 | XX S 30S2AM12 | XXS30S4AM12 |
| | | | A | XX A 30P1AM12 | XX A 30P2AM12 | | | XX A 30B1AM12 | XX A 30B2AM12 | | XX A 30S1AM12 | XX A 30S2AM12 | |
| | | | S | XX S 30P1VM12 | XX S 30P2VM12 | XXS30P4VM12 | | XX S 30B1VM12 | XX S 30B2VM12 | XXS30B4VM12 | XX S 30S1VM12 | XX S 30S2VM12 | XXS30S4VM12 |
| | | | A | XX A 30P1VM12 | XX A 30P2VM12 | | | XX A 30B1VM12 | XX A 30B2VM12 | | XX A 30S1VM12 | XX A 30S2VM12 | |
| Analog + NO or NC | DC4 | PNP | 4...20 mA + PNP | | | | XXS30P8APM12 | | | | | | |
| | | | 0...10V + PNP | | | | XXS30P8VPM12 | | | | | | |


(1) Adjustable with XXZPB100 (2) Configurable with XXZBOX01 or XXZKIT01 by software. Software at: <https://tesensors.com/us/en/support/software/ultrasonic-xx-software>. (3) Push-button integrated on the product S = straight A = angled

Ultrasonics: XX Range


| | | Flat 7.6x19x33 | | Flat 16x30x74 | | Flat 60x30x18 + M18 | |
|------------------|------------|------------------|-----------------|---------------|--|--|------------------|
| Sensing distance | | 0.1 m | | 0.25 m | | 0.5 m Adjust. (1) 0.5 m Adjust. (1) | |
| Connectors | | M12 4 pin | | M12 4 pin | | M12 4 pin M12 4 pin | |
| NO | DC3 | PNP | XX7F1A2PAL01M12 | XX7K1A2PAM12 | | XX7V1A1PAM12 (1) | XX7V1A1NAM12 (1) |
| | | NPN | XX7F1A2NAL01M12 | XX7K1A2NAM12 | | | |
| Analog | | 4...20 mA | | | | XX9V1A1C2M12 (1) | |
| | | 0...10 V | | | | XX9V1A1F1M12 (1) | |

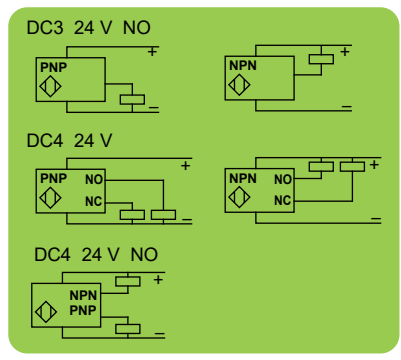


(1) Adjustable with XXZPB100




| | |
|-----|----------|
| M12 | XUZB2012 |
| M18 | XUZB2003 |
| M30 | XUZB2030 |



| | |
|----------|----------|
| For XX7K | |
| Flat | XXZ3074F |
| Cranked | XXZ3074S |



| | |
|------|---------|
| M12 | XXZ12 |
| M18 | XUZA118 |
| M30 | XXZ30 |
| XX7F | XXZ1933 |



Teach button XXZPB100

Ultrasonics: XXW54 Wide Beam Range



| Sensing distance | | | | 3 m | | | |
|---|------------|----------------------|-------------|--------------|---|----------------------------------|-----------------------------------|
| Connectors/Cables | | | | 0.5m cable | 0.15 cable + 6-pin Deutsch male connector | 0.15 cable + M12 5-pin connector | 0.15 m cable + DTM04-6P Connector |
| Digital Output | PNP | Analog Output | 0.5 - 4.5 V | XXW54P3HPL05 | XXW54P3HPL01DM6 | XXW54P3HPL01M12 | |
| | | | 4...20 mA | XXW54P3APL05 | XXW54P3APL01DM6 | XXW54P3APL01M12 | |
| | | CANJ1939 | | XXW54P3JL05 | | | XXW54P3JL01DM6 |
| Accessory: Deutsch male connector to M12 for connection to the configuration box. | | | | XXZKITDM6 | | XX Configuration Kit | XXZKIT01 |

XXW54 Wide Beam Ultrasonic Sensor:
Ideal for Mobile Equipment
obstacle detection



Photoelectric Sensors


Photoelectric Sensors detect objects using a light beam transmitter (light-emitting diode) and a light-sensitive receiver. Detection occurs when an object enters the transmitted light beam's path.



1 - Choose the body / the system

and the sensing distance


appropriate to the environment and requested accuracy of detection. Find a balance between location to install with access to the object (one or two sides), type of object, sensing distance and accuracy of detection desired.



| | XUB | XUM | XUK | XUX | |
|------------------------|------------|----------------|------------|-------------|-----------|
| Size (mm) | Ø18x46 | - | - | - | - |
| LxHxP (mm) | - | 10.8x31.5x19.5 | 18x50x50 | 30x92x71 | - |
| Sensing range, m (ft.) | 15 (49.21) | 30 (98.42) | 30 (98.42) | 40 (131.23) | Thru beam |
| | 4 (13.12) | 8 (26.24) | 7 (22.97) | 14 (45.93) | Reflex |
| | 0.6 (1.97) | 1.9 (6.23) | 1 (3.28) | 2.1 (6.89) | Diffuse |

2 - Choose the output type

according to the load compatibility (contactor, PLC...)
DC3 wires 24V PNP, NPN, AC/DC 5 wires relay 24-240V



3 - Choose the electrical connection

according to facility standards or machine requirements...
Cable, connector (M8, M12), screw clamp terminals (XUX)

4 - Choose the output signal & function

according to the automation function to achieve
Discrete (NO, NC, NO+NC)

Roller Conveyor Sensors: XUY Range




| | |
|--------------------------|---|
| Roller Sensor XUY | Hexagonal mounting |
| | Cable Length 0.3 m with M12 connector, 4 pins |
| | Connection for 474mm conveyor (1) |
| | XUY474NB4H03M12 |


| | |
|--|---------------|
| Accessory: Jumper M12 male/M12 female with 2 m cable | |
| straight | elbowed |
| XZCR1511041C2 | XZCR1512041C2 |

Please contact your local Sensors sales staff for assistance or go to: <https://tesensors.com/us/en/support/technical-support>
(1) Other lengths available from 200 to 1300mm, on request.

Forks: XUV Range



| | | A: 50 mm / B: 60 mm | | | A: 80 mm / B: 60 mm | | | A: 120 mm / B: 120 mm | | | A: 180 mm / B: 120 mm | | |
|-----------------|-----|---------------------|-----------|-------|---------------------|-------|-----------|-----------------------|-----------|-------|-----------------------|--|--|
| DC3 | PNP | M8 3 pin | XUVR0605P | A NM8 | XUVR0608P | A NM8 | XUVR1212P | A NM8 | XUVR1218P | A NM8 | | | |
| | NPN | M8 3 pin | XUVR0605N | A NM8 | XUVR0608N | A NM8 | XUVR1212N | A NM8 | XUVR1218N | A NM8 | | | |
| Output function | NO | | | A | | A | | A | | A | | | |
| | NC | | | B | | B | | B | | B | | | |



- XX512A1●●M8: Connector M8 4 pin
- XX512A2●●M8, XUVR●●●●●M8: Connector M8 3 pin
- XX●●●●●M12: Connector M12 4 pin

Cabling XS, XX & XU

| | | PUR pre wired connectors (female)* | | | Connectors (female) | | | |
|-----|------------------|------------------------------------|----------------|-----------------|---------------------|--------------|--------------|--------------|
| | | straight | elbowed | elbowed PNP LED | straight | elbowed | | |
| M8 | 3 pin | 2 m XZCP0566L2 | XZCP0666L2 | | (1) 4 pin | XZCC12FDM40B | XZCC12FCM40B | |
| | | 5 m XZCP0566L5 | XZCP0666L5 | | | (2) 4 pin | XZCC12FDP40B | XZCC12FCP40B |
| | | 10 m XZCP0566L10 | XZCP0666L10 | | | | | |
| | | 4 pin | 2 m XZCP0941L2 | XZCP1041L2 | | | | |
| M12 | | 5 m XZCP0941L5 | XZCP1041L5 | | | | | |
| | | 10 m XZCP0941L10 | XZCP1041L10 | | | | | |
| | 4 pin | 2 m XZCP1141L2 | XZCP1241L2 | XZCP1340L2 | M12 | straight | elbowed | |
| | | 5 m XZCP1141L5 | XZCP1241L5 | XZCP1340L5 | | 4 pin | XZCC12MDM40B | XZCC12MCM40B |
| | 10 m XZCP1141L10 | XZCP1241L10 | XZCP1340L10 | 5 pin | | XZCC12MDM50B | XZCC12MCM50B | |

*For a PVC cable, add the letter V after the P. Example: XZCPxxxxx become XZCPVxxxxx


Photo-electrics: XU Range



| | | Sensing distance | | | M18 metal | M18 plastic | |
|--|-------|------------------|--------------|---------------|---------------|---------------|---------------|
| | 0.6 m | DC3 | PNP | cable | XUB5BP A NL2 | XUB5AP A NL2 | |
| | | | | connector 4P | XUB5BP A NM12 | XUB5AP A NM12 | |
| | | NPN | cable | XUB5BN A NL2 | XUB5AN A NL2 | | |
| | | | connector 4P | XUB5BN A NM12 | XUB5AN A NM12 | | |
| | | 0.1 m | DC3 | PNP | cable | XUB4BP A NL2 | XUB4AP A NL2 |
| | | | | | connector 4P | XUB4BP A NM12 | XUB4AP A NM12 |
| | NPN | | cable | XUB4BN A NL2 | XUB4AN A NL2 | | |
| | | | connector 4P | XUB4BN A NM12 | XUB4AN A NM12 | | |

| Miniature | |
|-----------|--------------|
| 1.9 m | XUM5AP X BL2 |
| | XUM5AP X BM8 |
| | XUM5AN X BL2 |
| | XUM5AN X BM8 |
| 1.1 m | XUM6AP X BL2 |
| | XUM6AP X BM8 |
| | XUM6AN X BL2 |
| | XUM6AN X BM8 |
| 0.25 m | XUM4AP X BL2 |
| | XUM4AP X BM8 |
| | XUM4AN X BL2 |
| | XUM4AN X BM8 |
| 0.3 m | XUM8AP X BL2 |
| | XUM8AP X BM8 |
| | XUM8AN X BL2 |
| | XUM8AN X BM8 |

Background Suppression



| | | Sensing distance | | | M18 metal | M18 plastic | |
|--|-----|----------------------|--------------|---------------|---------------|---------------|--------|
| | 2 m | DC3 | PNP | cable | XUB9BP A NL2 | XUB9AP A NL2 | |
| | | | | connector 4P | XUB9BP A NM12 | XUB9AP A NM12 | |
| | | NPN | cable | XUB9BN A NL2 | XUB9AN A NL2 | | |
| | | | connector 4P | XUB9BN A NM12 | XUB9AN A NM12 | | |
| | | Accessory: Reflector | | | | XUZC50 | XUZC50 |

| | | |
|----------------------|--------------|--------|
| 8 m | XUM9AP X BL2 | |
| | XUM9AP X BM8 | |
| | XUM9AN X BL2 | |
| | XUM9AN X BM8 | |
| Accessory: Reflector | | XUZC50 |

| | | Sensing distance | | | M18 metal | M18 plastic | |
|--|-----|----------------------|--------------|---------------|---------------|---------------|--------|
| | 4 m | DC3 | PNP | cable | XUB1BP A NL2 | XUB1AP A NL2 | |
| | | | | connector 4P | XUB1BP A NM12 | XUB1AP A NM12 | |
| | | NPN | cable | XUB1BN A NL2 | XUB1AN A NL2 | | |
| | | | connector 4P | XUB1BN A NM12 | XUB1AN A NM12 | | |
| | | Accessory: Reflector | | | | XUZC50 | XUZC50 |

| | | Sensing distance | | | M18 metal | M18 plastic |
|--|------|------------------|--------------|--------------|----------------|----------------|
| | 15 m | DC3 | PNP | cable | XUB2BP A NL2R | XUB2AP A NL2R |
| | | | | connector 4P | XUB2BP A NM12R | XUB2AP A NM12R |
| | | | NPN | cable | XUB2BN A NL2R | XUB2AN A NL2R |
| | | | | connector 4P | XUB2BN A NM12R | XUB2AN A NM12R |
| | | Transmitter | cable | XUB2BKSNL2T | XUB2AKSNL2T | |
| | | | connector 4P | XUB2BKSNM12T | XUB2AKSNM12T | |
| | | Output function | NO | A | A | |
| | | | NC | B | B | |

| | |
|-----------------------------------|--------------|
| 30 m | XUM2AP X BL2 |
| | XUM2AP X BM8 |
| | XUM2AN X BL2 |
| | XUM2AN X BM8 |
| Transmitters are already included | |

| | | Sensing distance | | | M18 metal | M18 plastic |
|--|------------------|------------------|--------------|--------------|------------------------|-----------------|
| | DC3 | PNP | cable | XUB0BPSNL2 | XUB0APSNL2 | |
| | | | connector 4P | XUB0BPSNM12 | XUB0APSNM12 | |
| | | NPN | cable | XUB0BNSNL2 | XUB0ANSNL2 | |
| | | | connector 4P | XUB0BNSNM12 | XUB0ANSNM12 | |
| | Sensing distance | | | | Background Sup: 0.12 m | Diffuse: 0.3 m |
| | Output function | | | | Polarized reflex: 3 m | Thru-beam: 20 m |
| | Transmitter | DC | | cable | XUB0BKSNL2T | XUB0AKSNL2T |
| | | | | connector 4P | XUB0BKSNM12T | XUB0AKSNM12T |

| | |
|-------------------|-----------------------|
| XUM0APSNL2 | XUM0APSAM8 |
| | XUM0ANSNL2 |
| | XUM0ANSAM8 |
| | BGS: 0.1 m D: 0.4 m |
| P: 3 m TB: 10 m | |
| XUM0AKSNL2T | XUM0AKSAM8T |

Photo-electrics: XU Range

| | | Sensing distance | | Compact 50x50 mm | | | | Compact 92x71 mm | | | |
|--|-----|------------------|--------------|------------------|---------------|--------------|---------------|------------------|--------------|---------------|-------------|
| | 1 m | DC3 | PNP | cable | XUK5AP A NL2 | 2.1 m | DC3 | PNP | terminals | XUX5AP A NT16 | |
| | | | | connector 4P | XUK5AP A NM12 | | | | connector 4P | XUX5AP A NM12 | |
| | | NPN | cable | XUK5AN A NL2 | NPN | terminals | XUX5AN A NT16 | | | | |
| | | | connector 4P | XUK5AN A NM12 | | connector 4P | XUX5AN A NM12 | | | | |
| | | AC/DC | Relay | cable | | XUK5ARCNL2 | AC/DC | Relay | terminals | | XUX5ARCNT16 |
| | | | | Output function | | NO | | | A | A | |
| | | | | NC | B | | | B | | | |

| Background Suppression | 5 m | 0-10V + PNP/NPN | | connector 5P | XUK8T A E1MM12* |
|------------------------|-----|-----------------|--|--------------|-----------------|
| | | 4-20mA+PNP/NPN | | connector 5P | XUK8T A E2MM12* |
| | | 1 x PNP/NPN | | connector 4P | XUK8T A KSMM12* |
| | | 2 x PNP/NPN | | connector 5P | XUK8T A KDMM12* |

* = with I/O link TOF = Time of Flight

| Polarized Reflex | 5 m | DC3 | PNP | cable | XUK9AP A NL2 | |
|----------------------|-----|----------------------------|--------------|---------------|---------------|------------|
| | | | | connector 4P | XUK9AP A NM12 | |
| | | NPN | cable | XUK9AN A NL2 | | |
| | | | connector 4P | XUK9AN A NM12 | | |
| | | AC/DC | Relay | cable | | XUK9ARCNL2 |
| | | | | connector 8P | XUK9TAH2MM12 | |
| Accessory: Reflector | | XUZC50 (XUZC250 for XUK9T) | | | | |

| 11 m | DC3 | PNP | terminals | XUX9AP A NT16 | |
|------|-------|--------------|-------------------------------------|---------------|-------------|
| | | | connector 4P | XUX9AP A NM12 | |
| | NPN | terminals | XUX9AN A NT16 | | |
| | | connector 4P | XUX9AN A NM12 | | |
| | AC/DC | Relay | terminals | | XUX9ARCNT16 |
| | | | Anti-collision and Tandem functions | | XUZC50 |

| Reflex | 7 m | DC3 | PNP | cable | XUK1AP A NL2 | |
|--------|-----|-------|--------------|----------------------|---------------|------------|
| | | | | connector 4P | XUK1AP A NM12 | |
| | | NPN | cable | XUK1AN A NL2 | | |
| | | | connector 4P | XUK1AN A NM12 | | |
| | | AC/DC | Relay | cable | | XUK1ARCNL2 |
| | | | | Accessory: Reflector | | XUZC50 |


| 14 m | DC3 | PNP | terminals | XUX1AP A NT16 | |
|------|-------|--------------|----------------------|---------------|-------------|
| | | | connector 4P | XUX1AP A NM12 | |
| | NPN | terminals | XUX1AN A NT16 | | |
| | | connector 4P | XUX1AN A NM12 | | |
| | AC/DC | Relay | terminals | | XUX1ARCNT16 |
| | | | Accessory: Reflector | | XUZC50 |

| Thru-beam | 30 m | DC3 | PNP | cable | XUK2AP A NL2R | |
|-----------|------|-------|--------------|------------------------|----------------|-------------|
| | | | | connector 4P | XUK2AP A NM12R | |
| | | NPN | cable | XUK2AN A NL2R | | |
| | | | connector 4P | XUK2AN A NM12R | | |
| | | AC/DC | Relay | cable | | XUK2ARCNL2R |
| | | | | Accessory: Transmitter | | XUK2AKSNL2T |
| | | | | connector 4P | XUK2AKSNM12T | |
| | | | | cable | XUK2ARCNL2T | |

| 40 m | DC3 | PNP | terminals | XUX2AP A NT16R | |
|-------|-------|--------------|----------------|----------------|--------------|
| | | | connector 4P | XUX2AP A NM12R | |
| | NPN | terminals | XUX2AN A NT16R | | |
| | | connector 4P | XUX2AN A NM12R | | |
| | AC/DC | Relay | terminals | | XUX0AKSAT16T |
| | | | terminals | | XUX0AKSAM12T |
| AC/DC | Relay | terminals | | XUX2ARCNT16R | |
| | | terminals | | XUX0ARCTT16T | |

| Multimode | DC3 PNP/NPN | | cable | XUK0AKSAL2 | DC3 PNP/NPN | | terminals | XUX0AKSAT16 | |
|------------------------|-------------|--------------------------------|--------------|-----------------|-------------------------------|--------------|-----------------|-------------|--------------|
| | | | connector 4P | XUK0AKSAM12 | | | connector 4P | XUX0AKSAM12 | |
| | AC/DC Relay | | cable | | XUK0ARCTL2 | AC/DC Relay | | terminals | XUX0ARCTT16 |
| | | | | | | | | | |
| | | Background Suppression: 0.28 m | | Diffuse: 0.8 m | Background Suppression: 1.3 m | | Diffuse: 2 m | | |
| | | Polarized reflex: 4 m | | Thru-beam: 30 m | Polarized reflex: 11 m | | Thru-beam: 40 m | | |
| Accessory: Transmitter | | DC | cable | XUK0AKSAL2T | DC | terminals | XUX0AKSAT16T | | |
| | | | connector 4P | XUK0AKSAM12T | | connector 4P | XUX0AKSAM12T | | |
| | | AC/DC | cable | | XUK0ARCTL2T | AC/DC | terminals | | XUX0ARCTT16T |

| Other fixings | | |
|----------------|---------------------------|-------------------|
| Single bracket | standard | with ball joint |
| XUB | XUZA118 (stainless steel) | XUZA218 (plastic) |
| XUM | XUZA50 | - |
| XUK | XUZA51 | - |
| XUX | XUXZ2000 | - |

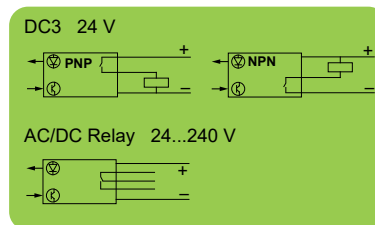

| XUK_T Accessories | |
|---------------------------------|-------------|
| Precision bracket | XUZASK004 |
| Protective bracket | XUZASK001 |
| L fixing bracket | XUZA51S |
| XUK9T Accessory | |
| M12 8-pin cable | XZCP29P12L5 |
| 250 x 250 mm adhesive reflector | XUZC250 |

See our Photoelectric Catalog at: <https://tesensors.com/us/en/document/DIA4ED2140904EN>

RFID Systems

XG RFID Systems make it possible to perform traceability, object identification (tracking) and access control functions. The information stored in the electronic tag is accessed using a simple radio frequency link.












The applications are numerous:

- Logistics: Goods out, goods in, transit, etc.
- Tracking and sorting of baggage
- Flexible assembly lines in the automotive sector
- Automatic toll booths
- Access control, etc.

XG RFID systems are also suitable for use in difficult environments (humidity, temperature, mechanical shock, vibration, dust, etc.)


Please contact your local Sensors sales staff for assistance or go to: <https://tesensors.com/us/en/support/technical-support>

RFID 13.56 MHz HF Readers: XG Range

| | | | | |
|--|---|---|---|-------------------------|
|  <p>Panel mounting (1)</p> |  |  |  | |
| | Compact 40x40mm | | | |
| | Sensing distance 18-70mm | | | |
| | Standalone - PNP output with 1 pulse | Modbus RTU | | |
| Blue body, M12 connector on back | IP69K White body with wiremote lights, M12 connector | Blue body, M12 connector on back | | |
| XGCS491B201 | XGCS49LB201 | XGCS490B201 | | |
| (1) compatible with ZB5AZ905 and XGSZCNFAC For more info on 22mm readers, see: https://tesensors.com/us/en/document/DIA4ED2160801EN | | | | |
|  <p>Screw mounting</p> |  |  |  | |
| | Compact 40x40mm | Compact 80x80mm | | |
| | Sensing distance 18-70mm | Sensing distance 20-100mm | | |
| | Modbus RTU | | Modbus TCP & Ethernet/IP | |
| Blue body, connector and cable by side | | | | |
| XGCS4901201 | XGCS8901201 | XGCS850C201 | | |
|  <p>Accessories</p> | XGSZCNFAC | Set of configuration badges | XZCC12MDB50R | M12 connector |
| | XGSZCNF01 | Configuration badge | XZCPV11V2L2/5/10 | M12 pre-wired connector |
| | XGHB90E341 | Pack of user's badges | XZCPV12V2L2/5/10 | M12 pre-wired connector |
| | XGHBPB3345 | Key fob tag | | |

See our complete RFID catalog at: <https://tesensors.com/us/en/document/DIA4ED2140601EN>

Cabling: General

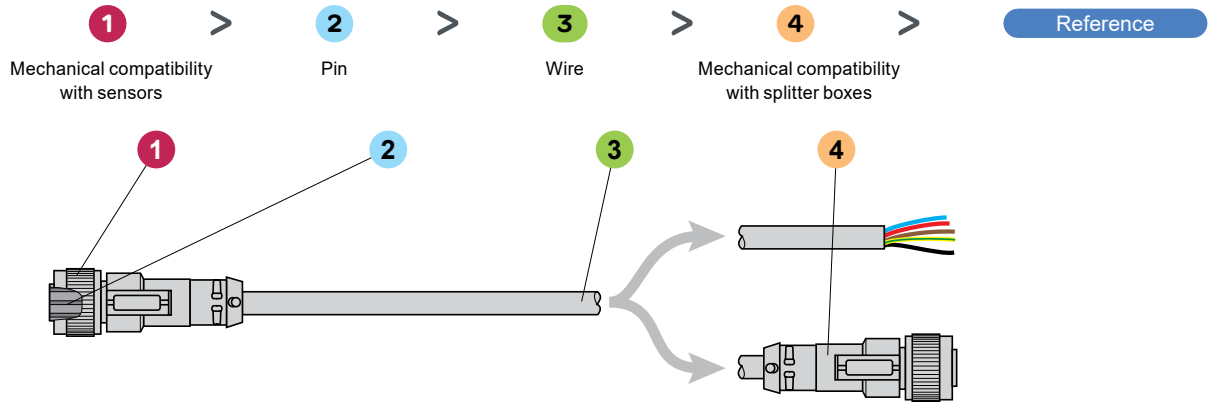

PUR cable for severe industrial environments

Designed for highly demanding industrial requirements, they are halogen free, UL certified and have high degrees of protection (IP67 and IP69K).

PVC cable for general use

Recommended for machines in non demanding environments and subject only to moderate mechanical stress.




F&B cable reinforced cable for food & beverage environments

Featuring hygienic design stainless steel 316L connectors with smooth clamping ring, these products withstand high pressure washing and disinfection using aggressive products.






Cabling: Pre-wired connectors M12

| | | M12 female | | | | | | M12 male | | | |
|---------------|-------|-----------------|--------------|--------------|--------------|--------------|-------------|--------------|--------------|--------------|-------------|
| | | 5 pin 3-wire | | 5 pin 4-wire | | 5 pin 4-wire | | 5 pin 5-wire | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| Clamping ring | | Stainless steel | metal | metal | metal | metal | metal | metal | metal | | |
| | | LED PNP | LED PNP | LED NPN | | | | | | | |
| PUR | 0.5 m | | | | | | | XZCP1541L05 | XZCP1564L05 | | |
| | 1 m | | | | | | | XZCP1541L1 | XZCP1564L1 | | |
| | 2 m | XZCP2540L2 | XZCP1340L2 | XZCP1440L2 | XZCP1141L2 | XZCP1241L2 | XZCP1169L2 | XZCP1164L2 | XZCP1264L2 | XZCP1541L2 | XZCP1564L2 |
| | 5 m | XZCP2540L5 | XZCP1340L5 | XZCP1440L5 | XZCP1141L5 | XZCP1241L5 | XZCP1169L5 | XZCP1164L5 | XZCP1264L5 | | |
| | 10 m | XZCP2540L10 | XZCP1340L10 | XZCP1440L10 | XZCP1141L10 | XZCP1241L10 | XZCP1169L10 | XZCP1164L10 | XZCP1264L10 | | |
| | 15 m | | | | XZCP1141L15 | XZCP1241L15 | | | | | |
| | 20 m | | | | XZCP1141L20 | XZCP1241L20 | | | | | |
| PVC | 1 m | | | | | | | | | XZCPV1541L1 | XZCPV1564L1 |
| | 2 m | | XZCPV1340L2 | | XZCPV1141L2 | XZCPV1241L2 | | XZCPV1164L2 | XZCPV1264L2 | XZCPV1541L2 | XZCPV1564L2 |
| | 5 m | | XZCPV1340L5 | | XZCPV1141L5 | XZCPV1241L5 | | XZCPV1164L5 | XZCPV1264L5 | XZCPV1541L5 | XZCPV1564L5 |
| | 10 m | | XZCPV1340L10 | | XZCPV1141L10 | XZCPV1241L10 | | XZCPV1164L10 | XZCPV1264L10 | | |
| F&B | 2 m | | | | XZCPA1141L2 | XZCPA1241L2 | | | | XZCPA1164L2 | |
| | 5 m | | | | XZCPA1141L5 | XZCPA1241L5 | | | | XZCPA1164L5 | |
| | 10 m | | | | XZCPA1141L10 | XZCPA1241L10 | | | | XZCPA1164L10 | |

Cabling: Pre-wired connectors 1/2" Connectors 1/2"
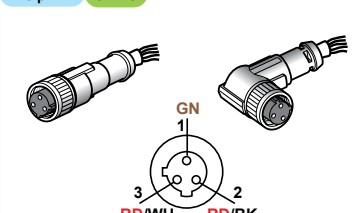
| | | 1/2" female | | 1/2" female | | 1/2" male | |
|-----|------|---|--------------|--|--------------|---|--------------|
| | | 3 pin | | 3 pin | | 3 pin | |
| | |  | |  | |  | |
| | | Metal clamping ring | | To screw terminals | | | |
| PUR | 2 m | XZCP1865L2 | XZCP1965L2 | XZCC20FDM30B | XZCC20FCM30B | XZCC20MDM30B | XZCC20MCM30B |
| | 5 m | XZCP1865L5 | XZCP1965L5 | | | | |
| | 10 m | XZCP1865L10 | XZCP1965L10 | | | | |
| PVC | 2 m | XZCPV1865L2 | XZCPV1965L2 | | | | |
| | 5 m | XZCPV1865L5 | XZCPV1965L5 | | | | |
| | 10 m | XZCPV1865L10 | XZCPV1965L10 | | | | |
| F&B | 5 m | XZCPA1865L5 | XZCPA1965L5 | | | | |
| | 10 m | XZCPA1865L10 | XZCPA1965L10 | | | | |

Cabling: Pre-wired connectors 7/8"⁽¹⁾


| | | 7/8" female | | | | | | | | | |
|-----|------|--|-------------|--|-------------|--|--------------|--|--|--|--|
| | | 3 pin | | 5 pin | | 3 pin | | 4 pin (2) | | 5 pin (2) | |
| | |  | |  | |  | |  | |  | |
| PUR | 2 m | XZCP1662L2 | XZCP1670L2 | XZCP1764L2 | XZCP1774L2 | XZCPV1670L2 | XZCPY4275L2 | XZCPY1764L2 | | | |
| | 5 m | XZCP1662L5 | XZCP1670L5 | XZCP1764L5 | XZCP1774L5 | XZCPV1670L5 | XZCPY4275L5 | XZCPY1764L5 | | | |
| | 10 m | | XZCP1670L10 | XZCP1764L10 | XZCP1774L10 | XZCPV1670L10 | XZCPY4275L10 | XZCPY1764L10 | | | |

(1) UL listing available for XZCPV and XZCPY 7/8" Pre-Wired connectors only. (2) XZCPY 4 and 5 pin Pre-Wired Connectors are yellow PVC and ST00W exterior cable material.

Jumper for valve

EN 175301-803-A / Female 4 pin

M12 male 5 pin




| | | |
|-----|-----|---------------|
| PUR | 1 m | XZCR1523062K1 |
| | 2 m | XZCR1523062K2 |

Connector for valve

EN 175301-803-A female

4 pin




To screw terminals

| |
|--------------|
| XZCC43FCP40B |
|--------------|

Connectors M18

M18 female




4 pin



To screw terminals

| | |
|--------------|--------------|
| XZCC18FDP40B | XZCC18FCP40B |
|--------------|--------------|

Connectors M23

| | | M23 female | | M23 female | | M23 male | |
|--|--|---|---------------|--|---------------|---|---------------|
| | | 16 pin | | 19 pin | | 19 pin | |
| | |  | |  | |  | |
| | | To solder terminals | | | | | |
| | | XZCC23FDM160S | XZCC23FCM160S | XZCC23FDM190S | XZCC23FCM190S | XZCC23MDM190S | XZCC23MCM190S |

Jumpers M12

| | M12 Female | 5 pin | 5 pin / 90° | 5 pin | 5 pin / 90° | 5 pin | 5 pin / 90° |
|-----|------------|----------------|----------------|---------------|---------------|---------------|---------------|
| | M12 Male | 5 pin | | 5 pin | | 5 pin | |
| | | | | | | | |
| | | | | | | | |
| PUR | 1 m | XZCR1511040A1 | XZCR1512040A1 | XZCR1511040E1 | XZCR1512040E1 | XZCR1511062B1 | XZCR1512062B1 |
| | 2 m | XZCR1511040A2 | XZCR1512040A2 | XZCR1511040E2 | XZCR1512040E2 | XZCR1511062B2 | XZCR1512062B2 |
| PVC | 1 m | XZCRV1511040A1 | XZCRV1512040A1 | | | | |
| | 2 m | XZCRV1511040A2 | XZCRV1512040A2 | | | | |
| F&B | 2 m | XZCRA151140A2 | | | | | |
| | 5 m | XZCRA151140A5 | | | | | |

| | M12 Female | 5 pin | 5 pin / 90° | 5 pin | 5 pin / 90° | 5 pin | 5 pin / 90° |
|-----|------------|---------------|---------------|----------------|----------------|---------------|---------------|
| | M12 Male | 5 pin | | 5 pin | | 5 pin | |
| | | | | | | | |
| | | | | | | | |
| PUR | 1 m | XZCR1511062F1 | XZCR1512062F1 | XZCR1511041C1 | XZCR1512041C1 | XZCR1511064D1 | XZCR1512064D1 |
| | 2 m | XZCR1511062F2 | XZCR1512062F2 | XZCR1511041C2 | XZCR1512041C2 | XZCR1511064D2 | XZCR1512064D2 |
| PVC | 1 m | | | XZCRV1511041C1 | XZCRV1512041C1 | | |
| | 2 m | | | XZCRV1511041C2 | XZCRV1512041C2 | | |
| | 5 m | | | XZCRV1511041C5 | XZCRV1512041C5 | | |
| F&B | 2 m | | | XZCRA151141C2 | | XZCRA151164D2 | |
| | 5 m | | | XZCRA151141C5 | | XZCRA151164D5 | |

Connectors M12

| | M12 Female | 4 pin | Male | 4 pin |
|--|-----------------------|--------------|--------------|--------------|
| | | | | |
| | | | | |
| | | | LED PNP | |
| | To screw terminals | XZCC12FDP40B | XZCC12FCP40B | XZCC12MCP42B |
| | Plastic clamping ring | XZCC12FDM40B | XZCC12FCM40B | XZCC12MDM40B |
| | Metal clamping ring | XZCC12FDM40B | XZCC12FCM40B | XZCC12MCM40B |

| | M12 Female | 5 pin | Male | 5 pin |
|--|---------------------|--------------|--------------|--------------|
| | | | | |
| | | | | |
| | | | | |
| | Metal clamping ring | XZCC12FDM50B | XZCC12FCM50B | XZCC12MDM50B |
| | To screw terminals | XZCC12FDM50B | XZCC12FCM50B | XZCC12MCM50B |
| | To spring terminals | XZCC12FDB50R | XZCC12MDB50R | |

Telemecanique Sensors safety sensing



...because just **ONE** workplace accident is too many...

For over 90 years, Telemecanique Sensors has developed quality sensor products to help engineers ensure their machines are safe to operate and meet all the industry's applicable safety standards.

Whether you need to secure a hazardous area, automate hazardous machinery shutdown when a specific area is entered, or provide workers with a readily available means to shut down hazardous machinery, Telemecanique Sensors has you covered with a variety of machine safety solutions.

Lock it. [Pages 27 - 28]



Telemecanique Sensors XCSLE and XCSLF solenoid locking safety interlock switches are designed to help protect personnel in hazardous machines applications where doors and guards must remain closed until the conditions behind the door or guard are no longer hazardous. The XCSLF switch will resist up to an industry leading 675 pounds (Fmax=3,000 Newtons) to keep the doors and guards in place. We also have a selection of safety switches for light machines without inertia with hinged doors, covers or protective guards; industrial and light machines without inertia for monitoring access guards, and safety magnetic switches.

Restrict access to it when it's running. [Pages 32 - 33]

ECOLAB



For hazardous machine environments utilizing doors or guards to separate workers from hazardous machinery, the XCSR RFID safety sensor provides a TÜV certified safety solution that comes with a Cat4/PL e - SIL3 rating. Easy to install and virtually tamper-proof, this contactless RFID safety sensor shuts down potentially hazardous machinery as soon as the door or designated guard to the machine area begins to open. This reliable solution comes in standalone, series, and single models.

Telemecanique Sensors' XUSL light curtains are designed to help protect persons operating or working in the vicinity of hazardous machinery by stopping the machine as soon as one of the light beams is broken. XUSL light curtains are built for rugged manufacturing environments, withstanding temperatures from -30° C to 55° C and carrying an IP67 rating (IP69K special models with **ECOLAB** conformity are available for XUSL4E and XUSL2E). Telemecanique Sensors new XUSL4M Light Curtains with integrated muting provide efficient detection of machine operators with uninterrupted automation processes.


Provide an easy way to shut it down. [Page 34]



The XY2CJ Emergency Stop Cable Pull Switch provides workers an emergency stop function of hazardous machinery with a single, quick pull. It replaces a number of emergency stop buttons over 100 feet / 30 meters. The XY2CJ Cable Pull Switch from Telemecanique Sensors is certified by UL-NiSD, allowing it to function as an emergency stop. For longer applications (up to 656 feet / 200 meters wide), the XY2CED Double-Sided Cable Pull Switch provides a UL-NiSD certified safety solution.

The following pages detail the above safety detection solutions and more!

Safety interlocking switches



For industrial machines with inertia for monitoring access guards

XCSLF
Metal

Locks on de-energisation of solenoid (1)

24V AC/DC (3)

Locking on de-energisation of solenoid with emergency by mushroom head pushbutton (1)

24V AC/DC (3)

| | | | | | |
|---------------------|--------------|--------------|---------------|---------------|---------------|
| Safety contacts (2) | NC+NO Slow | 2NC Slow | NC+2NO Slow | 2NC+NO Slow | 3NC Slow |
| Solenoid contacts | NC+NO Slow | 2NC Slow | NC+2NO Slow | 2NC+NO Slow | 3NC Slow |
| ISO M20 | XCSLF2525312 | XCSLF2727312 | XCSLF3535312 | XCSLF3737312 | XCSLF3838312 |
| 1/2"NPT | | XCSLF2727313 | XCSLF3535313 | XCSLF3737313 | XCSLF3838313 |
| M23 connector | | | XCSLF353531M3 | XCSLF373731M3 | XCSLF383831M3 |
| ISO M20 | | | XCSLF3535412 | XCSLF3737412 | |
| 1/2"NPT | | | | XCSLF3737413 | |
| M23 connector | | | XCSLF353541M3 | XCSLF373741M3 | |

XCSE
Metal

Locking on de-energisation of solenoid (1)

24V AC/DC (3)

| | | | |
|---------------------|-------------|-------------|------------|
| Safety contacts (2) | NC+2NO Slow | 2NC+NO Slow | 3NC Slow |
| Solenoid contacts | NC+NO Slow | NC+NO Slow | NC+NO Slow |
| ISO M20 | XCSE5312 | XCSE7312 | XCSE8312 |
| Pg13.5 | XCSE5311 | XCSE7311 | XCSE8311 |
| 1/2"NPT | XCSE5313 | XCSE7313 | XCSE8313 |

- (1) To choose the type of key actuator, please refer to Accessories
 (2) Schematic diagrams shown at the bottom of this page represent the contact states while the actuator is inserted in the head of the switch.
 (3) Some models with 120V AC/DC or 230V AC/DC are available.

For industrial machines without inertia for monitoring access guards

XCSA
Metal

Without locking of the actuator (1)

| | | | |
|---------------------|-------------|-------------|----------|
| Safety contacts (2) | NC+2NO Slow | 2NC+NO Slow | 3NC Slow |
| ISO M20 | XCSA502 | XCSA702 | XCSA802 |
| Pg13.5 | XCSA501 | XCSA701 | XCSA801 |
| 1/2"NPT | XCSA503 | XCSA703 | XCSA803 |

XCSB
Metal

Manual unlocking by button (1)

| | | | |
|---------------------|-------------|-------------|----------|
| Safety contacts (2) | NC+2NO Slow | 2NC+NO Slow | 3NC Slow |
| M20 | XCSB502 | XCSB702 | XCSB802 |
| Pg13.5 | XCSB501 | XCSB701 | XCSB801 |
| 1/2"NPT | XCSB503 | XCSB703 | XCSB803 |

XCSC
Metal

Manual unlocking by key lock (1)

| | | | |
|---------------------|-------------|-------------|----------|
| Safety contacts (2) | NC+2NO Slow | 2NC+NO Slow | 3NC Slow |
| M20 | XCSC502 | XCSC702 | XCSC802 |
| Pg13.5 | XCSC501 | XCSC701 | XCSC801 |
| 1/2"NPT | XCSC503 | XCSC703 | XCSC803 |

- (1) To choose the type of key actuator, please refer to Accessories
 (2) Schematic diagrams shown at the bottom of this page represent the contact states while the actuator is inserted in the head of the switch.

See our Safety Switches Catalog at: <https://tesensors.com/us/en/document/DIA4ED2191001EN>

Accessories for safety interlocking switches

| | | | | |
|--------------------------------|-----------------------|------------------------------------|-----------------------|---|
| | | | | |
| Key actuator | Straight key actuator | Key actuator with mounting bracket | Pivoting key actuator | Key actuator with latch for sliding doors |
| XCSLF, XCSE, XCSA, XCSB & XCSC | XCSZ01 | XCSZ02 | XCSZ03 | XCSZ05 |



Connection information

ISO M20 Tapped M20x1.5 for ISO cable gland

Pg13.5 Tapped for a N°13 cable gland


1/2" NPT Tapped for a 1/2" NPT

M23 to XCSLF***M3 products Connector M23, 19 pin

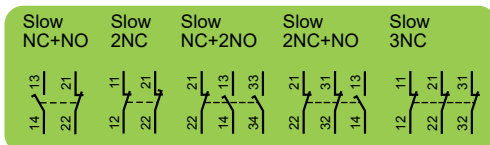


Cabling XCS

| | | |
|--------|---------------------|---------------|
| M23 | Connectors (female) | |
| 19 pin | straight | elbowed |
| | XZCC23FDM190S | XZCC23FCM190S |



Safety interlocking switches



For light machines with inertia for monitoring access guards

XCSLE
Plastic

Locking on de-energisation of solenoid (1)

24V AC/DC (3)

Safety contacts (2): NC+NO Slow, 2NC Slow, NC+2NO Slow, 2NC+NO Slow, 3NC Slow

Solenoid contacts: NC+NO Slow, 2NC Slow, NC+2NO Slow, 2NC+NO Slow, 3NC Slow

ISO M20: XCSLE2525312, XCSLE2727312, XCSLE3535312, XCSLE3737312, XCSLE3838312

1/2" NPT: XCSLE2727313

M23 connector: XCSLE353531M3, XCSLE373731M3

XCSTE
Plastic

Locking on de-energisation of solenoid (1)

24V AC/DC (3)

Safety contacts (2): NC+NO Slow, 2NC Slow

Solenoid contacts: NC+NO Slow, 2NC Slow

ISO M16: XCSTE5312, XCSTE7312

Pg11: XCSTE5311, XCSTE7311

1/2" NPT: XCSTE5313, XCSTE7313

- (1) To choose the type of key actuator, please refer to Accessories
- (2) Schematic diagrams shown represent the contact states whilst the actuator is inserted in the head of the switch.
- (3) Some models with 120V AC/DC or 230V AC/DC are available.

For light machines without inertia for monitoring access guards

XCSPA
Plastic

Without locking of the actuator (1)

Safety contacts (2): NC+NO Slow, 2NC Slow, NC+2NO Slow, 2NC+NO Slow

ISO M16: XCSPA592, XCSPA792, XCSPA892, XCSPA992

Pg11: XCSPA591, XCSPA791, XCSPA891, XCSPA991

1/2" NPT: XCSPA593, XCSPA793, XCSPA893, XCSPA993

XCSTA
Plastic

Without locking of the actuator (1)

Safety contacts (2): NC+2NO Slow, 2NC+NO Slow, 3NC Slow

ISO M16: XCSTA592, XCSTA792, XCSTA892

Pg11: XCSTA591, XCSTA791, XCSTA891

1/2" NPT: XCSTA593, XCSTA793, XCSTA893

XCSM
Plastic

Without locking of the actuator (1)

Safety contacts (2): NC+NO Slow, 2NC Slow, 2NC+NO Slow, 3NC Slow

Cable 2 m: XCSMP59L2, XCSMP79L2, XCSMP70L2, XCSMP80L2


Cable 5 m: XCSMP59L5, XCSMP79L5, XCSMP70L5, XCSMP80L5

Cable 10 m: XCSMP70L10, XCSMP80L10

- (1) To choose the type of key actuator, please refer to Accessories
- (2) Schematic diagrams shown represent the contact states whilst the actuator is inserted in the head of the switch.

See our Safety Switches Catalog at: <https://tesensors.com/us/en/document/DIA4ED2191001EN>

Accessories for safety interlocking switches






| Key actuator | Straight key actuator | Key actuator with wide fixing | Pivoting key actuator |
|----------------------------|-----------------------|-------------------------------|-----------------------|
| XCSLE | XCSZ01 | XCSZ02 | XCSZ03 |
| XCSTE, XCSPA, XCSTA | XCSZ11 | XCSZ12 | XCSZ13 |
| XCSMP | XCSZ81 | XCSZ84 | XCSZ83 (1) |

(1) The key actuator XCSZ83 can be used just for right-hand doors. To ordered for left-hand doors, the reference will be XCSZ85.

Connection information

- ISO M16** Tapped M16x1.5 for ISO cable gland
- ISO M20** Tapped M20x1.5 for ISO cable gland
- Pg11** Tapped for a N°11 cable gland
- Pg13.5** Tapped for a N°13 cable gland
- 1/2" NPT** Tapped for a 1/2" NPT

M23 to XCSLE*M3 products** Connector M23, 19 pin

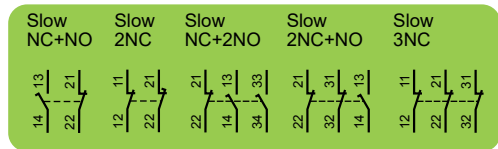

Cabling XCS

| | Connectors (female) | |
|---------------|---------------------|---------------|
| | straight | elbowed |
| M23 | XZCC23FDM190S | XZCC23FCM190S |
| 19 pin | | |

Safety switches with rotary level



For light machines without inertia with hinged doors, covers or protective guards

| XCSP L Plastic | Safety contacts (1) | | | | | |
|-------------------|---------------------|---------------------------------|-----------------------------------|----------------------------------|--|------------------------------------|
| | | Elbowed lever, operator to left | Elbowed lever, operator to centre | Elbowed lever, operator to right | Straight lever, operator to right OR to left (2) | Straight lever, operator to centre |
| ISO M16 | NC+NO slow | XCSPL592 | XCSPL582 | XCSPL572 | XCSPL562 | XCSPL552 |
| | 2NC slow | XCSPL792 | XCSPL782 | XCSPL772 | XCSPL762 | XCSPL752 |
| | NC+2NO slow | | | | XCSPL862 | |
| | 2NC+NO slow | | | | XCSPL962 | |
| Pg11 | NC+NO slow | XCSPL591 | XCSPL581 | XCSPL571 | XCSPL561 | XCSPL551 |
| | 2NC slow | XCSPL791 | XCSPL781 | XCSPL771 | XCSPL761 | XCSPL751 |
| | 2NC+NO slow | | XCSPL981 | | | |
| 1/2"NPT | NC+NO slow | XCSPL593 | XCSPL583 | XCSPL573 | XCSPL563 | XCSPL553 |
| | 2NC slow | XCSPL793 | XCSPL783 | XCSPL773 | XCSPL763 | XCSPL753 |

- (1) Schematic diagrams shown represent the contact states whilst the lever is in the rest position.
 (2) To change the operator from right to left, rotate the turret head by 180°.

| XCSP R Plastic | Safety contacts (1) | | | | |
|--------------------------|---------------------|------------|----------|-------------|-------------|
| | | NC+NO Slow | 2NC Slow | NC+2NO Slow | 2NC+NO Slow |
| Spindle length 30 mm (2) | ISO M16 | XCSPR552 | XCSPR752 | | XCSPR952 |
| | Pg11 | XCSPR551 | XCSPR751 | XCSPR851 | XCSPR951 |
| | 1/2"NPT | XCSPR553 | XCSPR753 | | |

- (1) Schematic diagrams shown represent the contact states whilst the spindle is the rest position.
 (2) For switches with 80 mm spindle, replace the 2nd number in the reference by 6. Ex: XCSPR562.


| XCSTR Plastic | Safety contacts (1) | | | |
|--------------------------|---------------------|-------------|-------------|----------|
| | | NC+2NO Slow | 2NC+NO Slow | 3NC Slow |
| Spindle length 30 mm (2) | ISO M16 | XCSTR552 | XCSTR752 | XCSTR852 |
| | Pg11 | XCSTR551 | XCSTR751 | XCSTR851 |
| | 1/2"NPT (3) | XCSTR553 | XCSTR753 | XCSTR853 |

- (1) Schematic diagrams shown represent the contact states whilst the spindle is the rest position.
 (2) For switches with 80 mm spindle, replace the 2nd number in the reference by 6. Ex: XCSTR562
 (3) Supply with one metal adaptor DE9RA1012 (Pg11 1/2"NPT) and one blanking plug. For a second 1/2"NPT conduit entry please order a second adaptor.


See our Safety Switches Catalog at: <https://tesensors.com/us/en/document/DIA4ED2191001EN>

Connection information

- ISO M16** Tapped M16x1.5 for ISO cable gland
- Pg11** Tapped for a N°11 cable gland
- 1/2" NPT** Tapped for a 1/2" NPT

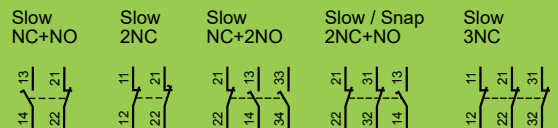

Safety limit switches



For industrial and Light machines without inertia for monitoring access guards

| Model | Material | Safety contacts (3) | Type of operator | Actuator Type | | | | | |
|-------------|--------------|---------------------|------------------|-------------------|----------------------|----------------------------|--------------------|-------------|-------------|
| | | | | Metal end plunger | Steel roller plunger | Thermoplastic roller lever | Steel roller lever | | |
| XCSD | Metal | 2NC+NO Snap | ISO M20 | XCSD3910P20 | XCSD3902P20 | XCSD3918P20 | XCSD3919P20 | | |
| | | | Pg13.5 | XCSD3910G13 | XCSD3902G13 | XCSD3918G13 | XCSD3919G13 | | |
| | | | 1/2" NPT | XCSD3910N12 | XCSD3902N12 | XCSD3918N12 | XCSD3919N12 | | |
| | | | 2NC+NO Slow | ISO M20 | XCSD3710P20 | XCSD3702P20 | XCSD3718P20 | XCSD3719P20 | |
| | | | | Pg13.5 | XCSD3710G13 | XCSD3702G13 | XCSD3718G13 | XCSD3719G13 | |
| | | | | 1/2" NPT | XCSD3710N12 | XCSD3702N12 | XCSD3718N12 | XCSD3719N12 | |
| | | XCSP | Plastic | 2NC+NO Snap | ISO M20 | XCSP3910P20 | XCSP3902P20 | XCSP3918P20 | XCSP3919P20 |
| | | | | | Pg13.5 | XCSP3910G13 | XCSP3902G13 | XCSP3918G13 | XCSP3919G13 |
| 1/2" NPT | XCSP3910N12 | | | | XCSP3902N12 | XCSP3918N12 | XCSP3919N12 | | |
| XCSM | Metal | | | | 2NC+NO Slow | Cable 1m | XCSM3710L1 | XCSM3702L1 | XCSM3715L1 |
| | | Cable 2m | XCSM3710L2 | XCSM3702L2 | | XCSM3715L2 | XCSM3716L2 | | |
| | | Cable 5m | XCSM3710L5 | XCSM3702L5 | | XCSM3715L5 | XCSM3716L5 | | |
| | | 2NC+2NO Snap | Cable 1m | XCSM4110L1 | | XCSM4102L1 | XCSM4115L1 | XCSM4116L1 | |
| | | | Cable 2m | XCSM4110L2 | XCSM4102L2 | XCSM4115L2 | XCSM4116L2 | | |
| | | | Cable 5m | XCSM4110L5 | XCSM4102L5 | XCSM4115L5 | XCSM4116L5 | | |

(1) Schematic diagrams shown represent the contact states whilst the actuator is in the rest position.


See our Safety Switches Catalog at: <https://tesensors.com/us/en/document/DIA4ED2191001EN>

Connection information

ISO M20 Tapped M20x1.5 for ISO cable gland

Pg13.5 Tapped for a N°13 cable gland



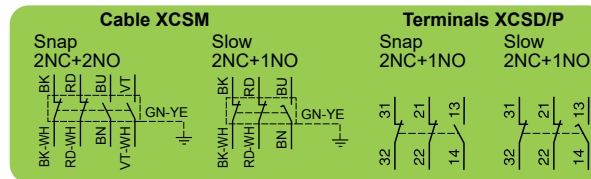


1/2" NPT Tapped for a 1/2" NPT



Safety magnetic switches



For industrial machines without inertia with imprecise guidance and frequent washing

| | | Coded magnetic switches | | | | |
|---|---|-------------------------|-----------------|-----------------|-----------------|-----------------|
| XCSDMR Plastic  M30x38.5 | Operating zone (1) Sao: 8 mm / Sar: 20 mm | | | | | |
| | Without LED | Safety contacts (2) | NC + NO | 2NC | | |
| | | Cable 2 m (3) | XCSDMR5902 | XCSDMR7902 | | |
| | | M12 4P | XCSDMR590L01M12 | XCSDMR790L01M12 | | |
| | With LED | Cable 2 m (3) | XCSDMR5912 | XCSDMR7912 | | |
| | M12 4P | XCSDMR591L01M12 | XCSDMR791L01M12 | | | |
|  | | | | | | |
| XCSDMC Plastic  Dimensions: 51, 75, 16 | Operating zone (1) Sao: 5 mm / Sar: 15 mm | | | | | |
| | Without LED | Safety contacts (2) | NC + NO | 2NC | | |
| | | Cable 2 m (3) | XCSDMC5902 | XCSDMC7902 | | |
| | | M8 4P | XCSDMC590L01M8 | XCSDMC790L01M8 | | |
| | With LED | Cable 2 m (3) | XCSDMC5912 | XCSDMC7912 | | |
| | M8 4P | XCSDMC591L01M8 | XCSDMC791L01M8 | | | |
|  | | | | | | |
| XCSDMP Plastic  Dimensions: 88, 13, 25 | Operating zone (1) Sao: 8 mm / Sar: 20 mm | | | | | |
| | Without LED | Safety contacts (2) | NC + NO | 2NC | NC + 2NO | 2NC + NO |
| | | Cable 2 m (3) | XCSDMP5902 | XCSDMP7902 | XCSDMP5002 | XCSDMP7002 |
| | | M12 4P or 8P (4) | XCSDMP590L01M12 | XCSDMP790L01M12 | XCSDMP500L01M12 | XCSDMP700L01M12 |
| | With LED | Cable 2 m (3) | XCSDMP5912 | | XCSDMP5012 | XCSDMP7012 |
| | M12 4P or 8P (4) | XCSDMP591L01M12 | XCSDMP791L01M12 | XCSDMP501L01M12 | XCSDMP701L01M12 | |


(1) Sao: Assured operating distance; Sar: Assured tripping distance
 (2) Schematic diagrams shown represent the contact states whilst the magnet is in front of the switch.
 (3) For switches with other cable lengths, replace the last number in the reference by 5 for 5 meters or 10 by 10 meters. Ex: **XCSDMC5905**
 (4) M12 4P for XCSDMP59/79 (2 contacts), M12 8P for XCSDMP50/70 (3 contacts)

Accessories for safety magnetic switches

| Pre-wired female connectors | | M8 4 pin | M12 8 pin | M12 4 pin | M12 8 pin (A coding) |
|-----------------------------|------|-------------|--------------|-------------|----------------------|
| Straight | 2 m | XZCP0941L2 | XZCP29P11L2 | XZCP1141L2 | XZCP29P12L2 |
| | 5 m | XZCP0941L5 | XZCP29P11L5 | XZCP1141L5 | XZCP29P12L5 |
| | 10 m | XZCP0941L10 | XZCP29P11L10 | XZCP1141L10 | XZCP29P12L10 |

See our Safety Switches Catalog at: <https://tesensors.com/us/en/document/DIA4ED2191001EN>

RFID contactless safety switches



| | | | | |
|---|--|---|--|---|
| XCSR | Maximum Safety Level | PL=e, category4 conforming to EN/ISO 13849-1 and SIL 3 conforming to EN/IEC 61508 | | |
| | Type | Standalone | Series connection (Daisy-chain) (2) (3) | Point-to-point connection (Single) |
| | | Possible functioning with no safety control unit | Functioning in combination with a safety control unit PL=e/Cat4 - SIL3 | |
| | Transponder + Factory matched reader - Single matching Automatic start + EDM | XCSRC11AM12 (1) | | |
| Transponder + Factory matched reader - Single matching Manual monitored start + EDM | XCSRC11MM12 (1) | | | |
| Transponder + Reader matched in factory - Single matching | | XCSRC12M12 (1) | XCSRC10M12 (1) | |

- (1) For the versions allowing a new pairing of a blank transponder XCSRK2A3 (maximum 2 new pairings), replace the first reference digit '1' by '3'. For example, reference XCSRC10M12 becomes XCSRC30M12. As soon as a blank transponder has been paired, the former transponder is no longer valid. A blank transponder can be matched only once
- (2) The use of the serial diagnosis unit XCSR210MDB is optional but highly recommended. This diagnosis unit provides and localizes the state of every XCSR sensors of the chain (open/close safe guard status, presence of errors, cabling issue, ...).
- (3) The first sensor of serial connexion must be coupled with the loopback chain adaptor XCSRZE

RFID contactless safety switch accessories




| | | | | | | |
|--|--|-----------------------|----------------------|----------------------|-----------------------|-----------------------|
| Type | Connection M12 - Pre-wired - for XCSR "Single" or "Daisy Chain" (1) | | | | | |
| | XCSRC10M12 - XCSRC30M12 - XCSRC12M12 (1) and XCSR32M12 (1) | | | | | |
| Pre-wired length (cable material: PUR) | 2 m | 5 m | 10 m | 20 m | | |
| Connector M12 / 5-pin Female | Straight - Pre-wired | XZCP11V12L2 | XZCP11V12L5 | XZCP11V12L10 | XZCP11V12L20 | |
| | 90° - Pre-wired | XZCP12V12L2 | XZCP12V12L5 | XZCP12V12L10 | XZCP12V12L20 | |
| Type | Connection M12 - Pre-wired - for XCSR "Standalone" | | | | | |
| | XCSRC11AM12 - XCSRC31AM12 - XCSRC11MM12 and XCSR31M12 | | | | | |
| Pre-wired length (cable material: PUR) | 2 m | 5 m | 10 m | 20 m | | |
| Connector M12 / 8-pin Female | Straight - Pre-wired | XZCP29P12L2 | XZCP29P12L5 | XZCP29P12L10 | XZCP29P12L20 | |
| | 90° - Pre-wired | XZCP53P12L2 | XZCP53P12L5 | XZCP53P12L10 | XZCP53P12L20 | |
| Type | Connection 2xM12 - Jumpers for XCSR "Daisy Chain" | | | | | |
| | XCSRC12M12 - XCSRC32M12 | | | | | |
| Pre-wired length (cable material: PUR) | 0.3 m | 3 m | 5 m | 10 m | 25 m | |
| 2 Connectors Straight female M12 5 pins | Pre-cabled for serial link directly between the sensors | XZCR1111064D03 | XZCR1111064D3 | XZCR1111064D5 | XZCR1111064D10 | XZCR1111064D25 |

(1) For the connection of the last safety switch of the chain (XCSRC12M12 or XCSRC32M12) to the safety control unit

See our Safety Switches Catalog at: <https://tesensors.com/us/en/document/DIA4ED2191001EN>

Safety light curtains



| XUSL Type 4 | | Finger detection (resolution 14 mm) | Hand detection (resolution 30 mm) | Body detection (detection thru 2-3 or 4 beams) |
|-------------------------------------|---------------|---|--------------------------------------|---|
| Finger, hand and body detection (5) | | Sensing distance 0...3m or 1...6m selectable | | |
| PLe/Cat4 - SIL3 | | Sensing distance 0...4m or 0...12m selectable | | |
| | | Automatic or manual start/restart | | |
| | | External Device Monitoring (EDM) | | |
| Height protected (mm) | | | | |
| 160 | XUSL4E14F016N | XUSL4E30H016N | | |
| 260 | | XUSL4E30H026N | | |
| 310 | XUSL4E14F031N | XUSL4E30H031N | | |
| 460 | XUSL4E14F046N | XUSL4E30H046N | | |
| 510 - 2 beams | | | | XUSL4E2BB051N |
| 610 | XUSL4E14F061N | XUSL4E30H061N | | |
| 760 | XUSL4E14F076N | XUSL4E30H076N | | |
| 810 - 3 beams | | | | XUSL4E3BB081N |
| 910 | XUSL4E14F091N | XUSL4E30H091N | | |
| 910 - 4 beams | | | | XUSL4E4BB091N |
| 1060 | XUSL4E14F106N | XUSL4E30H106N | | |
| 1210 | XUSL4E14F121N | XUSL4E30H121N | | |
| 1360 | XUSL4E14F136N | XUSL4E30H136N | | |
| 1510 | XUSL4E14F151N | XUSL4E30H151N | | |
| 1660 | XUSL4E14F166N | XUSL4E30H166N | | |
| 1810 | XUSL4E14F181N | XUSL4E30H181N | | |
| | | | | |
| 510 - 2 beams | | | | XUSL4MA2BB051N (2) |
| 810 - 3 beams | | | | XUSL4MB2BB051N (3) |
| 910 - 4 beams | | | | XUSL4MA3BB081N (2) |
| | | | | XUSL4MB3BB081N (3) |
| | | | | XUSL4MA4BB091N (2) |
| | | | | XUSL4MB4BB091N (3) |

Integrated muting (1) (4)

- XUSL4MA2BB051N (2)
- XUSL4MB2BB051N (3)
- XUSL4MA3BB081N (2)
- XUSL4MB3BB081N (3)
- XUSL4MA4BB091N (2)
- XUSL4MB4BB091N (3)


- Possible association with pre-built/pre-adjusted muting arms XUSZAS* (single beam muting sensors) and XUSZAM* multi-beam muting sensors).
- Hardware and Software configuration (with SoMute software), partial muting and integrated muting lamp
- Hardware configuration only
- For hand detection, some models are available in 30mm and 40mm resolutions, in different protected heights
- IP69K special models with ECOLAB conformity are available for XUSL4E and XUSL2E

| XUSL Type 2 | | Hand detection (resolution 30 mm) | Body detection (thru 2-3 or 4 beams) |
|-----------------------------|---------------|---|---|
| Hand and body detection (5) | | Sensing distance 0...4m or 0...12m selectable | |
| PLc/Cat2 - SIL1 | | Automatic or manual start/restart | |
| | | External Device Monitoring (EDM) | |
| | | | |
| Height protected (mm) | | | |
| 160 | XUSL2E30H016N | | |
| 260 | XUSL2E30H026N | | |
| 310 | XUSL2E30H031N | | |
| 460 | XUSL2E30H046N | | |
| 510 - 2 beams | | | XUSL2E2BB051N |
| 610 | XUSL2E30H061N | | |
| 760 | XUSL2E30H076N | | |
| 810 - 3 beams | | | XUSL2E3BB081N |
| 910 | XUSL2E30H091N | | |
| 910 - 4 beams | | | XUSL2E4BB091N |
| 1060 | XUSL2E30H106N | | |
| 1210 | XUSL2E30H121N | | |
| 1360 | XUSL2E30H136N | | |
| 1510 | XUSL2E30H151N | | |
| 1660 | XUSL2E30H166N | | |
| 1810 | XUSL2E30H181N | | |

| Accessories | For use with... | |
|--------------------------------|-------------------------------|---------------------------|
| Pre-wired connectors | XUSL2E*/4E*/4M* | XUSL2E*/4E* |
| | M12 connector 5 pins - Female | |
| | Transmitter | |
| | Straight | 90° |
| XZCP1164L | Length | |
| | 2 m | XZCP1164L2 XZCP1264L2 |
| | 5 m | XZCP1164L5 XZCP1264L5 |
| | 10 m | XZCP1164L10 XZCP1264L10 |
| | 15 m | XZCP1164L15 XZCP1264L15 |
| XZCP1264L | 25 m | XZCP1164L25 XZCP1264L25 |
| | For use with XUSL2E* / 4E* | |
| | M12 connector 8 pins - Female | |
| | Receiver | |
| | Length | Straight |
| XZCP29P11L | 2 m | XZCP29P11L2 XZCP53P11L2 |
| | 5 m | XZCP29P11L5 XZCP53P11L5 |
| | 10 m | XZCP29P11L10 XZCP53P11L10 |
| | 15 m | XZCP29P11L15 XZCP53P11L15 |
| | 25 m | XZCP29P11L25 XZCP53P11L25 |
| For use with XUSL4M* | | |
| M12 connector 12 pins - Female | | |
| Receiver | | |
| Length | Straight | |
| XZCP57V12L | 5 m | XZCP57V12L5 |
| | 10 m | XZCP57V12L10 |
| | 15 m | XZCP57V12L15 |

See our Safety Light Curtains Catalog at: <https://tesensors.com/us/en/document/DIA4ED2150403EN>

Emergency stop rope pull switches



| XY2CJ | | Threaded cable entries - anchoring point | NC+NO | 2NC | 2NC+NO |
|--------------|---|--|-------------------|--------------|------------------|
| Metal |  | | Pg13.5 - straight | XY2CJS15 (1) | XY2CJS17 (1) |
| | 20 meters cable length | Pg13.5 - right side | XY2CJR15 (1) | XY2CJR17 (1) | XY2CJR19 (1) (2) |
| | 30 meters cable length | Pg13.5 - left side | XY2CJL15 (1) | XY2CJL17 (1) | XY2CJL19 (1) (2) |
| | 30 meters cable length | | | | |


- (1) For ISO M20, just add "H29" to the part number (example: XY2CJS15 becomes XY2CJS15H29)
 (2) For 1/2" NPT, just add "H7" to the part number (example: XY2CJS19 becomes XY2CJS19H7)

| XY2CH | | Tapped cable entries | NC+NO | 2NC | 2NC+NO |
|--------------|---|----------------------|---------------|----------------|----------------|
| Metal |  | | Pg13.5 | XY2CH13250 (3) | XY2CH13270 (3) |
| | 30 meters cable length | ISO M20 | XY2CH13250H29 | XY2CH13270H29 | XY2CH13290H29 |
| | Reset by booted pushbutton; | 1/2" NPT | XY2CH13250H7 | XY2CH13270H7 | XY2CH13290H7 |

(3) Also available with pilot light

| XY2CE | | Plain hole cable entries | NC+NO | 2NC | 2NC+2NO |
|--------------|---|--------------------------|--------------|--------------|----------------|
| Metal |  | | Pg13.5 | XY2CE1A250 | XY2CE1A270 |
| | 70 meters cable length | 1/2" NPT | XY2CE1A250H7 | XY2CE1A270H7 | XY2CE1A290H7 |
| | Reset by booted pushbutton; Anchor point on right side. | Pg13.5 | XY2CE2A250 | XY2CE2A270 | XY2CE2A290 (4) |
| | Reset by booted pushbutton; Anchor point on left side. | 1/2" NPT | XY2CE2A250H7 | XY2CE2A270H7 | XY2CE2A290H7 |

(4) Also available with pilot light

| XY2CED | | Plain hole cable entries | 2 NC + 2 NO slow break |
|---------------|--|--------------------------|------------------------|
| Metal |  | | Pg13.5 |
| | >=2 x 35 meters cable length and <=2 x 100 meters cable length | 1/2" NPT | XY2CEDA290H7 |
| | Reset by booted pushbutton | Pg13.5 | XY2CEDA590 (5) |
| | Reset by key release (N° 455) pushbutton | | |


- (5) Also available with pilot light
 An adjustment shim and 2 end springs are supplied with **XY2CED** switches.

| Accessories | XY2CJ | XY2CH | XY2CE | XY2CED |
|--------------|---------------|---------------|---------------|----------------|
| Mounting kit | XY2CZ9425 (5) | XY2CZ9330 (6) | XY2CZ9570 (7) | XY2CZ96200 (8) |

- (5) Kit contents: 1 galvanised cable L:30.5 (Ø 3.2 mm), quick tensioner, cable supports, and end spring.
 (6) Kit contents: 1 galvanised cable L: 30.5 m (Ø 3.2 mm) and end spring.
 (7) Kit contents: 1 galvanised cable L: 70.5 m (Ø 5 mm), turnbuckle, cable supports, cable end protectors and end spring.
 (8) Kit contents: 2 galvanised cables L: 100.5m (D 5mm) and quick tensioners.

See our Emergency Stop Rope Pull Switches Catalog at: <https://tesensors.com/us/en/document/DIA4ED2151201EN>


Safety modules for monitoring

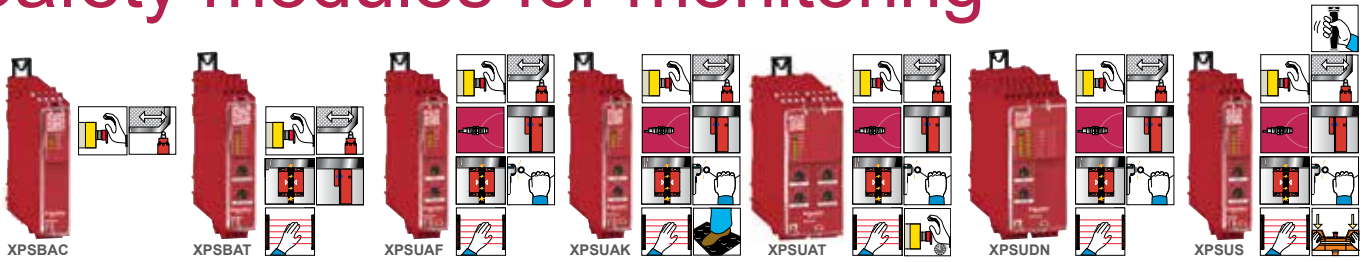

| | | | | | | | |
|-------------------------------------|--|--|----------------------|--------------------------------------|---|--------------------------------------|----------------------------------|
| Maximum achievable safety level | PL e / Category 4 conforming to ISO 13849-1 SILCL3 conforming to IEC 62061 SIL3 conforming to IEC61508 | | | | | | |
| Number of outputs | 4 NO + 2 NC | 2 NO, 1 NO delayed (selectable from 0.1s to 15min) 1 solid state | 3 NO 1 pulsed output | 2 NO 1 redundant NC, 1 pulsed output | 3 NO immediate, 3 NO delayed (selectable from 0.1 s to 15 min. by 10 steps of 10 steps of 0.1 s which can be multiplied by 1, 10, 100, and 1,000) or immediate + 1 NC | 3 NO 1 redundant NC, 1 pulsed output | 2 NO 1 pulsed output |
| References | XPSBAC | XPSBAT | XPSUAF | XPSUAK | XPSUAT | XPSUDN | XPSUS |
| Display | 5 LEDS | 8 LEDS | 6 LEDS | 6 LEDS | 8 LEDS | 16 LEDS | 6 LEDS |
| Supply voltage | 240 V AC/DC | 24 V AC/DC | | | 24 V AC/DC and 48-240 V AC/DC | | |
| Supply voltage | 24 V AC/DC & 48-240 V AC/DC | 24 V AC/DC | | | 24 V AC/DC and 48-240 V AC/DC | | |
| Synchronization time between inputs | Fixed | | | Selectable | | | |
| Input channels | 2 | 2 | 2 | 2 | 3 | 12 | 4 |
| Start input | Automatic, manual & monitored start | | | | | | |
| Control configurable pulsed outputs | NA | | 3 ON/OFF | | 4 ON/OFF | | 7 ON/OFF 3 ON/OFF |
| Module width | | 22.5 mm/0.886 in. | | | 45 mm/1.77 in. | | 45 mm/1.77 in. 22.5 mm/0.886 in. |

Complete references and other XPS Basic and Universal Modules are available on www.schneider-electric.com

Modular safety controller XPSMCM

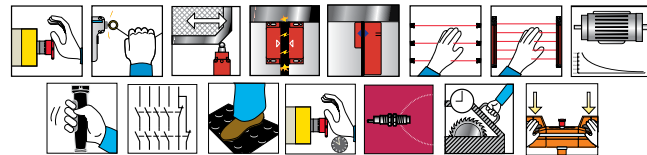





| | | | | | | | |
|------------------------------|--|--|--|---|---|--|----------------------|
| Maximum safety level reached | PL e / Cat 4 SILCL 3 5 (EN/ISO 13849-1, EN/IEC 62061) | | | | | | Without safety level |
| Function | Central Unit (CPU) (standalone) (2) | Extension units input/output | Extension units Outputs Relay | Extension units speed control | Extension units Communication | Extension units communication bus | |
| Case dimensions | 22.5 x 99 x 114.5 | | | | | | |
| References | XPSMCMCP0802 (1) | XPSMCMMX | XPSMCMER | XPSMCMEN | XPSMCMCO000S | XPSMCMCO0000 | |
| Main characteristics | - 8 digital inputs - 2 OSSD pairs 400mA - 4 Test outputs - 2 Status outputs - 2 EDM inputs | - 8 digital inputs - 2 OSSD pairs 400mA - 4 Test outputs - 2 Status outputs - 2 EDM inputs | - 2 or 4 Safety relay outputs 2NO + 1NC (without connection to the extension bus) - 1 or 2 EDM inputs | - 1 or 2 inputs for coder (TTL or HTL or Sin/Cos) or 1 or 2 inputs for proximity sensors - 2 Outputs digital configurables | - for connection XPSMCMCP0802* to remote modules (≤ 50m) - creation to 6 islands, with full length of 250m and maximum 50m between 2 communication modules | - For data exchange and network systems diagnosis or field-bus - available interfaces (CAN open, Ethernet IP, Modbus RTU, Modbus TCP, Profibus DP and EtherCAT USB) | |
| References | XPSMCMC10804 (1) | XPSMCMCI | XPSMCMRO | | | | |
| Main characteristics | - 8 digital inputs - 4 OSSDs 400mA - 4 Test outputs - 4 Status outputs | - 8 or 16 digital inputs - 4 Test outputs | - 4 modules Safety relay outputs 2NO + 1NC (with connection to the extension bus) - 4 independent safety relay outputs and 4 EDM outputs corresponding - 0 or 8 Status outputs | | | | |
| Reference | | XPSMCMDO | | | | | |
| Main characteristics | - Compatible with Extension module XPSMCMAI0400, channels analogic input | - 2 pairs or 4 OSSDs 400mA - 2 or 4 Status outputs - 2 or 4 EDM inputs | | | | | |

(1) Configuration, Programming, simulation and documentation by means of an intuitive software (SoSafe).
(2) Extension units available (input, output, relay, speed control, communication).






Applications

For more complex sensing needs, refer to www.tesensors.com or the Telemecanique Sensors Essentials Catalog for information relative to the sensors described below.






XC for special applications

| | |
|---|---|
| One of the most comprehensive offering of special limit switches dedicated to severe environments and heavy duty service. Mainly for: hoisting, handling, mining, minerals and metals and other harsh environmental constraints (foundry, welding and automotive industries etc...) | |
| Severe duty for hoisting and material handling applications |  |
| Specifically designed products for belt shift monitoring |  |
| Cross Limit Switches - Dedicated products for overhead cranes and block hoists for end of travel control |  |
| Robust Mill & Foundry Switch |  |

Safety detection





| | |
|---|---|
| One of the most comprehensive offerings of industrial safety switches on the market, complemented by a range of safety light curtains and safety mats for dangerous machines in industrials segments. Example: packaging, handling, robotics, machines tools, presses, automotive market. | |
| Detection of gates or cover openings | |
| Guard switches with mechanical actuator |  |
| Rotary lever and spindle-operated guard switches for hinge guards |  |
| Coded magnetic guard switches |  |
| Safety RFID switches |  |
| Detection of operators in free access zone | |
| Safety light curtains |  |

XS for special applications




| | |
|---|---|
| One of the most comprehensive offerings of inductive sensors for general purpose as well as assembly machines, robotics, machine-tools, machining, packaging, materials handling, conveying and food and beverage industry. | |
| Rotation control, ferrous/non-ferrous detection |  |
| Plastic case sensors for double insulation and chemical environment compliance |  |
| Miniature cylindrical format plain, smooth barrel 4 mm and 6.5 mm or M5 for assembly applications |  |
| Stainless steel and plastic housings for dedicated food & beverage applications |  |
| Capacitive sensors XT range for detection of insulating or conductive materials |  |

The information and dimensions in this catalog are provided for the convenience of our customers. While this information is believed to be accurate, Schneider Electric reserves the right to make updates and changes without prior notification and assumes no liability for any errors or omissions.




XU for special applications

| | |
|--|---|
| A dedicated offering of application specific products for packaging, handling, assembly, conveying, food & beverage, complete the general purpose offer. | |
| Detection of transparent materials |  |
| Mark readers, luminescence sensors, color sensors |  |
| Label detection |  |
| Laser technology sensors |  |

XG RFID inductive identification system

| | |
|--|---|
| With OsiSense XG, discover a complete RFID system comprised of 13.56 MHz smart antennas, electronic tags and network connection accessories. OsiSense XG simplifies access to tag data with automatic adaptation to the protocol and speed of the network used (Ethernet IP, ModbusTCP/IP, Modbus RTU, Uni-Telway and Profibus DP). With a broad line of RFID tags and accessories, OsiSense XG is the ideal choice for manufacturing track, trace and control applications. | |
| Compact stations with integrated controller and antenna, now with integrated Ethernet IP and Modbus TCP/IP. |  |
| 13.56 MHz electronic tags |  |
| Portable RFID terminal and network connection boxes |  |

Cabling Accessories

| | |
|--|---|
| High-performance, quick and easy connectors to all our sensors are available in our XZ range. Reference identification and the connection processes are user friendly. | |
| Pre-wired connectors |  |
| Jumper cables |  |
| Connectors |  |

For our complete selection of sensor solutions, visit www.tesensors.com

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier – CS 30323
F92506 Rueil-Malmaison Cedex
FRANCE

www.tesensors.com

Due to the constant evolution of standards and equipment, the specifications indicated in the text and images of this document can only be guaranteed after confirmation by our departments. Print: Schneider Electric Photos: Schneider Electric

©2022 Schneider Electric. All Rights Reserved. Schneider Electric, OsiSense, and Telemecanique are trademarks and the property of Schneider Electric SE, its subsidiaries and affiliated companies. All other trademarks are the property of their respective owners.

June 2022 9006BR2201NAM