

## Midi free-standing Beacons / EvoSIGNAL

### Midi Rotating 115-230VAC BU



|           |                |
|-----------|----------------|
| Part No.: | 261.540.60     |
| Series:   | EvoSIGNAL Midi |



#### MECHANICAL DATA

|                              |                             |
|------------------------------|-----------------------------|
| Height                       | 130 mm                      |
| Diameter                     | 85 mm                       |
| Materials                    | PC<br>PC/ABS                |
| Dome colour                  | Blue                        |
| Housing colour               | Gray                        |
| Protection category          | IP66                        |
| Connection                   | Push-in terminal            |
| cross-sectional area minimum | 0,25mm <sup>2</sup> / 24AWG |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Service life optical         | 50,000 h minimum            |
| Working temperature minimum  | -30°C                       |
| Working temperature maximum  | +60°C                       |
| Weight with packaging        | 326 g                       |
| Product weight               | 226 g                       |

#### ELECTRICAL DATA

|                             |                          |
|-----------------------------|--------------------------|
| Operating voltage           | 115-230V                 |
| Operating voltage type      | AC                       |
| Operating voltage tolerance | +/- 10%                  |
| Rated operational voltage   | 230 VAC                  |
| Rated operational current   | 110 mA                   |
| Protection class            | Protection class 2       |
| Pollution degree            | 3                        |
| Overvoltage category        | II                       |
| Isolation voltage           | Ui = 250V; Uimp = 2.500V |

#### OPTICAL DATA

|                          |           |
|--------------------------|-----------|
| Light source             | LED       |
| Light colour             | Blue      |
| Optical signal image     | Revolving |
| Rotation frequency (rpm) | 180 U/min |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / EvoSIGNAL

## Midi Rotating 115-230VAC BU

DRAWING

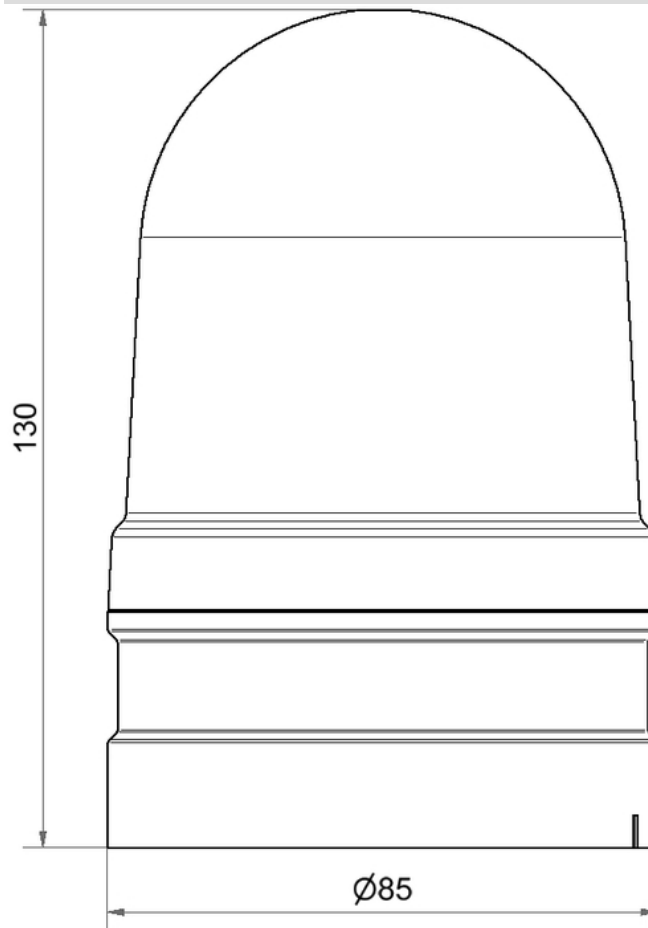

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.