

# ExpertSystem XL

Modular pressure-sensitive edge system for gate applications

**Highly sensitive, economical, appealing**

- High sensitivity and quick response time
- Fast assembly and easy installation
- Attractive appearance for seamless integration into gate/door design

# ExpertSystem XL

## Safety edges with integrated switching contact

### Safety edges for experts, by experts

Safety edges on automatic gates and doors prevent people from becoming injured and vehicles from sustaining damage. They need to spring into action the instant they are required, deforming until the gate drive is able to stop the dangerous movement. With this in mind, ExpertSystem XL products deliver quick response times and are designed for maximum overtravel and flexible plasticity. Not only does it meet normative requirements, but ExpertSystem XL also boasts a fully concealed mounting profile that enables it to blend discreetly into ambitious gate designs. The material they are made from, EPDM, is highly durable and maintains its mechanical and colour-fast properties over many years.

### Pre-assembled, as an edge kit, or for self-assembly

ExpertSystem XL pressure-sensitive edges are tailor-made for your requirements: they can be either preassembled as products cut to length, supplied in kits at a standard length of 2 m, or provided as a modular system for simple self-assembly.



## Benefits

### Highly sensitive

Thanks to the innovative profile cross-section and short contact actuating, ExpertSystem XL pressure-sensitive edges respond even at low actuating forces. ExpertSystem XL profiles possess large effective activation areas and angles – essential for devices such as folding gates.

### Economical

The plug-in contact end pieces allow ExpertSystem XL safety edges to be assembled in a matter of minutes. The trigger-safe screw-fit plug connections and plug-on profile end caps also ensure very short assembly times on the gate or door – even while servicing is being performed.

### Appealing

The extended overtravel makes it possible to choose the smallest available profile height for the application. ExpertSystem XL profiles cover the aluminium profile fully and can be integrated discreetly into ambitious gate designs.



## ExpertSystem XL profile types

Contact profile	XL-CP42A	XL-CP49A		XL-CP74A		XL-CP99A
Article no.	411870	389110		389109		389087
Safety edge	XL-CP42A24x	XL-CP49A30x	XL-CP49A36x	XL-CP74A30x	XL-CP74A36x	XL-CP99A36x
Mounting profile	XL-AP24	XL-AP30	XL-AP36	XL-AP30	XL-AP36	XL-AP36
Actuating force <sup>1)</sup> (200 mm/s)	< 40 N	< 50 N		< 45 N		< 40 N
Pre-travel <sup>1)</sup> (200 mm/s)	< 2.5 mm	< 3 mm		< 4 mm		< 3 mm
Overtravel <sup>1)</sup> (400 N, 10 mm/s)	> 16 mm	> 24 mm		> 42 mm		> 69 mm

<sup>1)</sup> acc. to EN ISO 13856-2, temp. 23°C, test object ø 80 mm, measuring point C3




## System overview

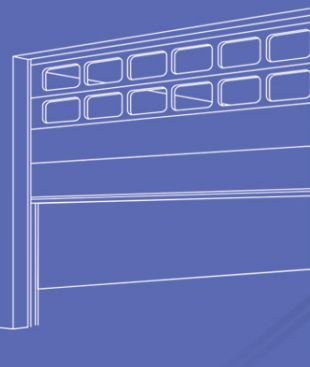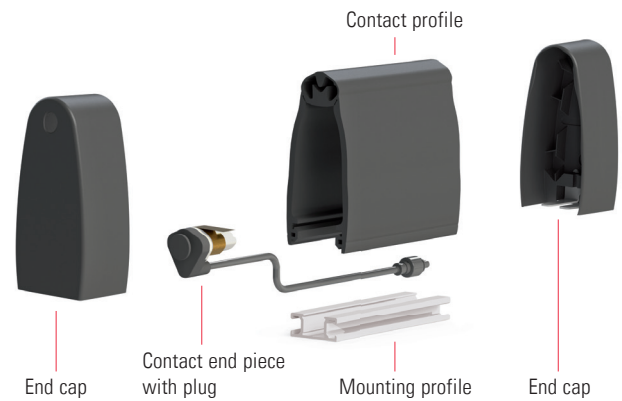

## Applications

### Situation

Sliding gate at site entrance



### Solution

In cases where sliding gates are being used at site entrances, there is the need to safeguard not only the primary closing edge, but also multiple secondary closing edges. This is where ExpertSystem XL's fast, largely tool-free assembly concept and its plug connector-based wiring technique really come into their own, as they make it possible to cut installation times significantly.

### Situation

Swing gate




### Solution

An ever increasing number of home owners are choosing swing doors in striking and even extravagant designs for the entrances to their properties. With a concealed aluminium profile, matching end caps and concealable cable routing, ExpertSystem XL is characterised by its clear lines. It will blend in perfectly in any setting and can be relied upon for safety – especially if there are children playing nearby.

### Situation

Bi-folding gate




### Solution

Leaves of bi-folding gates do not move in a straight line. They can turn up to 90 degrees along their longitudinal axis while a closing movement is taking place, and this inevitably leads to lateral activation of the safety edges. ExpertSystem XL is ideally placed to deal with this thanks to its large effective activation areas and angles.

### Situation

Servicing



### Solution

When servicing is being carried out, ExpertSystem XL offers considerable advantages during the process of replacing defective cables and safety edges that vehicles have run into and damaged. ExpertSystem XL's plug-in cable connections enable quick installation in just a few simple steps.

## ExpertSystem XL tailor-made

ExpertSystem XL safety edges are available as an assembled complete solution that is always sure to be a perfect fit. Let us know your requirements and we will configure all of the necessary pressure-sensitive edges complete with the required connecting cables and switching devices to suit your specific needs.

## ExpertSystem XL kits

ExpertSystem XL safety edges are available in defined lengths as self-assembly kits. The profiles simply have to be shortened to the length required at the gate or door. The new safety edge can be installed in a matter of minutes.

Article no.	Name	Length up to	Height x width
424713	<b>XL-CP42A24/KT/2000/8K/5</b>	2000 mm	42 mm x 29 mm
412009	<b>XL-CP49A30/KT/2000/8k/5</b>	2000 mm	49 mm x 36 mm
415039	<b>XL-CP49A36/KT/2000/8k/5</b>	2000 mm	49 mm x 42 mm
425262	<b>XL-CP49A36/KT/2500/8K/5</b>	2500 mm	
412010	<b>XL-CP74A30/KT/2000/8k/5</b>	2000 mm	74 mm x 37 mm
415042	<b>XL-CP74A36/KT/2000/8k/5</b>	2000 mm	74 mm x 43 mm
425263	<b>XL-CP74A36/KT/2500/8K/5</b>	2500 mm	
415043	<b>XL-CP99A36/KT/2000/8k/5</b>	2000 mm	99 mm x 44 mm

Kits include: 1x contact profile, 1x mounting profile, 2x contact end pieces, 2x end caps, 1x resistor plug 8.2 kOhm and 1x 5 m connection cable.

## Technical data

Contact profile material	EPDM, non-conductive, black
Hardness	Approx. 70 Shore A
Switching contact material	EPDM, conductive
Contact resistance	Typ. < 200 ohm, max. < 500 ohm
Resistance per unit length	< 2 ohm/m
Operating temperature range	-20°C to +60°C
Max. voltage	24 V ACDC
Continuous current load at max. voltage	10 mA
Protection class of assembled edge	IP67
Connection	2-pin cable
Plug connections	Coded, with screw locking
Resistor plug	8.2 kOhm (0.6 W)
Storage temperature for components	Permanent 0°C to 40°C recommended, short-term -30°C to 60°C possible
Product standards	EN 12978 and EN ISO 13856-2 (type approval)
RoHS; REACH	Compliant

### Note

Technical details and recommendations concerning our products are based on experience and are an aid for the orientation of the user. Details stated in our brochures and data sheets do not guarantee special properties of the products. This does not apply to special product properties confirmed by us in writing or individually. Subject to technical alterations.

## ExpertSystem XL components

Article no.	Description	
411870	<b>XL-CP42A contact profile</b> , H 42 mm (25 m)	
389110	<b>XL-CP49A contact profile</b> , H 49 mm (25 m)	
389109	<b>XL-CP74A contact profile</b> , H 74 mm (25 m)	
389087	<b>XL-CP99A contact profile</b> , H 99 mm (25 m)	
412002	<b>XL-AP24 mounting profile</b> , aluminium, W 24 mm (6.1 m)	
402162	<b>XL-AP30 mounting profile</b> , aluminium, W 30 mm (6.1 m)	
402163	<b>XL-AP36 mounting profile</b> , aluminium, W 36 mm (6.1 m)	
409584	<b>XL-AP3020 mounting profile</b> , aluminium, W 30 mm, black anodized (6.1 m)	
409585	<b>XL-AP3620 mounting profile</b> , aluminium, W 36 mm, black anodized (6.1 m)	
412005	<b>XL-AP30Q mounting profile</b> , aluminium, W 30 mm, punched for quick mount (6.1 m)	
412006	<b>XL-AP36Q mounting profile</b> , aluminium, W 36 mm, punched for quick mount (6.1 m)	
412007	<b>XL-AP3020Q mounting profile</b> , aluminium, W 30 mm, black anodized, punched for quick mount (6.1 m)	
412008	<b>XL-AP3620Q mounting profile</b> , aluminium, W 36 mm, black anodized, punched for quick mount (6.1 m)	
411987	<b>XL-QME quick mount element</b> Stainless steel, brass (75 pcs.)	
413856	<b>XL-QFIX self-drilling screw PH for XL-QME</b> 4.2 x 19 mm, hardened, zinc plated (100 pcs.)	

Article no.	Description	
424373	<b>XL-C4224 end cap</b> for contact profile XL-CP42A on mounting profile XL-AP24 (Set à 2 Stk.)	
409902	<b>XL-C4930 end cap</b> for contact profile XL-CP49A on mounting profile XL-AP30x (set of 2 pcs.)	
409887	<b>XL-C4936 end cap</b> for contact profile XL-CP49A on mounting profile XL-AP36x (set of 2 pcs.)	
409903	<b>XL-C7430 end cap</b> for contact profile XL-CP74A on mounting profile XL-AP30x (set of 2 pcs.)	
409889	<b>XL-C7436 end cap</b> for contact profile XL-CP74A on mounting profile XL-AP36x (set of 2 pcs.)	
409901	<b>XL-C9936 end cap</b> for contact profile XL-CP99A on mounting profile XL-AP36x (set of 2 pcs.)	
411903	<b>XL-EP3020 end plugs</b> f. mounting profile XL-AP3020x	
411902	<b>XL-EP3620 end plugs</b> f. mounting profile XL-AP3620x (set left/right)	
389111	<b>XL-CEP contact end piece</b> with cable and connecting plug (f), (set of 2 pcs.)	
389114	<b>XL-RP8 resistor plug 8.2 kOhm</b> with connecting plug (m)	
	<b>XL-CCx connection cable</b> one connecting plug (m), one open cable end	
	389119 <b>XL-CC1</b> , length 1 m    389120 <b>XL-CC2</b> , length 2 m	
	389121 <b>XL-CC5</b> , length 5 m    389122 <b>XL-CC10</b> , length 10 m	
	389123 <b>XL-CC20</b> , length 20 m	
	<b>XL-ICx intermediate connection cable</b> two connecting plugs (m/m)	
	398436 <b>XL-IC0.2</b> , length 0.2 m    389124 <b>XL-IC1</b> , length 1 m	
	389125 <b>XL-IC2</b> , length 2 m    396456 <b>XL-IC3.5</b> , length 3.5 m	
	389126 <b>XL-IC5</b> , length 5 m    429645 <b>XL-IC17</b> , length 17 m	
	<b>XL-EC1 Extension cable</b> two connecting plugs (f/m)	
	420769 <b>XL-EC1</b> , length 1 m	
411989	<b>XL-EASE hand tool</b> for easy pressing in of the contact profiles	
212876	<b>XL-CUT rubber profile cutters</b> (cut length 75 mm)	

### BBC Bircher Smart Access

Wiesengasse 20  
8222 Beringen  
Switzerland  
Tel. +41 52 687 11 11  
info@bircher.com  
www.bircher.com