

Midi Horns and Sirens / EvoSIGNAL

Midi Sounder 115-230VAC GY



Part No.:	161.700.60
Series:	EvoSIGNAL Midi



MECHANICAL DATA

Height	78 mm
Diameter	85 mm
Materials	PC PC/ABS
Housing colour	Gray
Protection category	IP66
Connection	Push-in terminal
cross-sectional area minimum	0,25mm ² / 24AWG
cross-sectional area maximum	1,50mm ² / 16AWG
Acoustic service life	5,000 h minimum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	236 g
Product weight	136 g

ELECTRICAL DATA

Operating voltage	115-230V
Operating voltage type	AC
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	105 mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

ACUSTICAL DATA


Volume/dB(max) at 1m distance	110 dB(A)
Acoustic signal image	Multi-tone
Number of tones	10 tone
Audio frequency	3300 Hz



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi Horns and Sirens / EvoSIGNAL **Midi Sounder 115-230VAC GY**

DRAWING

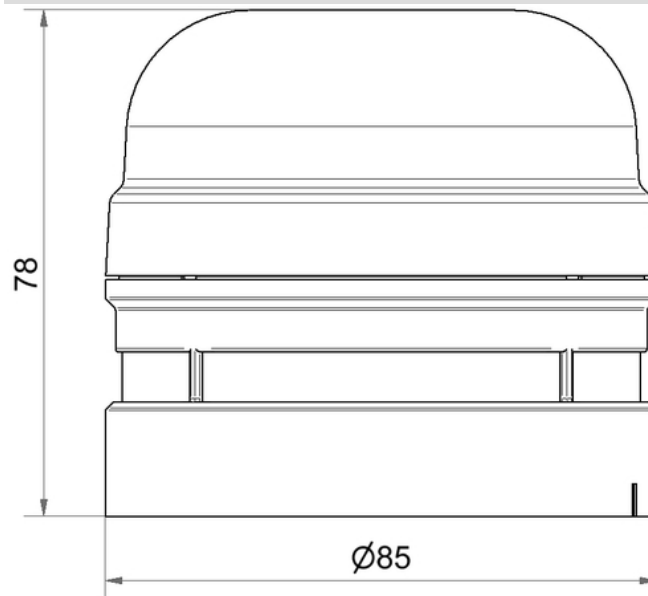

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.